

# 10 MINUTES VOLTAGE SET




Ginlong Technologies Co., Ltd.

## 10 MINUTES VOLTAGE SET


**STEP 1:** Press Enter on the inverter screen.




**STEP 2:** Use Up/Down keys to go to advanced settings and press Enter.

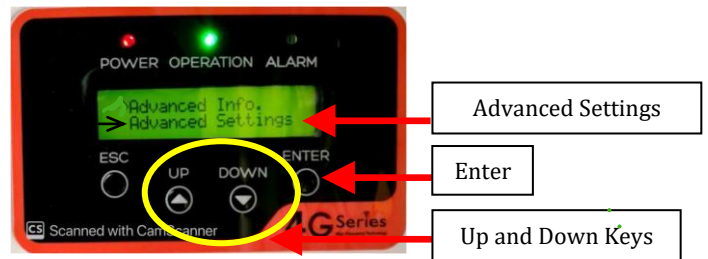


**STEP 3:** Press Down key twice and Up key once, to type the password as 0010. Then press Enter.

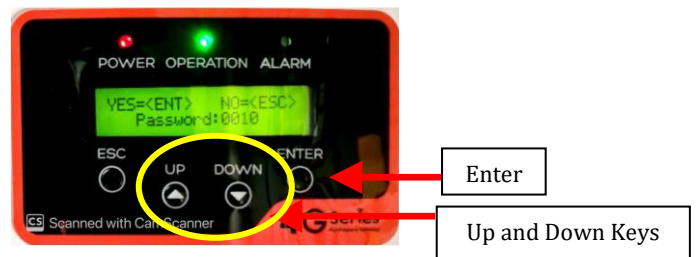


**STEP 4:** Use the up/down keys to scroll to Grid ON/ Grid OFF. Then press Enter.

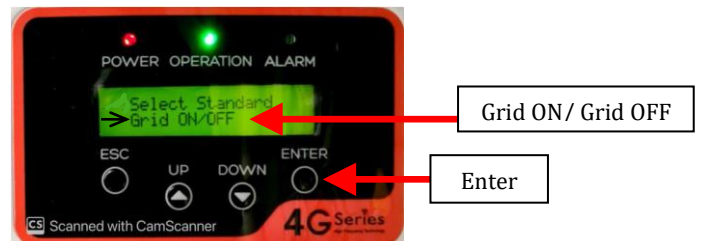


**STEP 5:** Select the Grid OFF option and press Enter. You will see the operation light turn OFF.

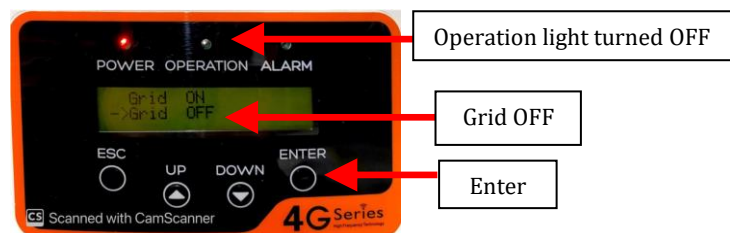

**STEP 6:** Press Up/Down key until you find 'STD Mode Settings'. Press Enter.

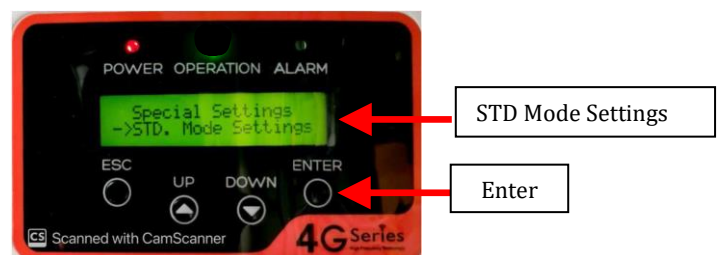

**STEP 7:** Press Up/Down key until you see '10 mins Voltage Set'. Press Enter.

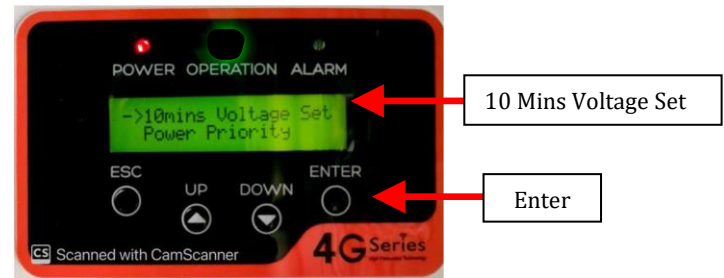

**STEP 8:** You can change the voltage value by pressing the Up key (By default, the 10 mins voltage set is 255V or 257V).

You can set a maximum of 258 Volts.

Press Enter to Save.

**STEP 9:** Now turn the Grid ON in Advanced Settings.

(Go to Advanced Settings again by pressing ESC thrice < Set password 0010 < Go to Grid ON/Grid OFF < Select Grid ON < Press Enter).

“ALL DONE”

HAVE A GOOD DAY!