



**Solis: The World's 3rd Largest
PV Inverter Manufacturer**

Developing technology to
power the world with clean energy


**COMPANY
MISSION**



COMPANY PROFILE

Established in 2005, Ginlong (Solis) (Stock Code: 300763.SZ) stands as the world's third-largest PV inverter manufacturer. As a global provider of solar and energy storage solutions catering to residential, commercial, and utility-scale customers, we deliver value across the solar supply chain. Operating under the Solis brand, our solar inverter product line employs innovative string technology, ensuring top-tier reliability validated through rigorous international certifications.

By amalgamating a global supply chain with world-class R&D and manufacturing capabilities, Ginlong tailors Solis inverters to each regional market, with dedicated teams of local experts providing exceptional service and support. Our proven bankability has garnered support from leading financial institutions, assuring robust, long-term returns on investment. Collaborating with stakeholders, we are committed to expediting the world's journey towards a more sustainable future.

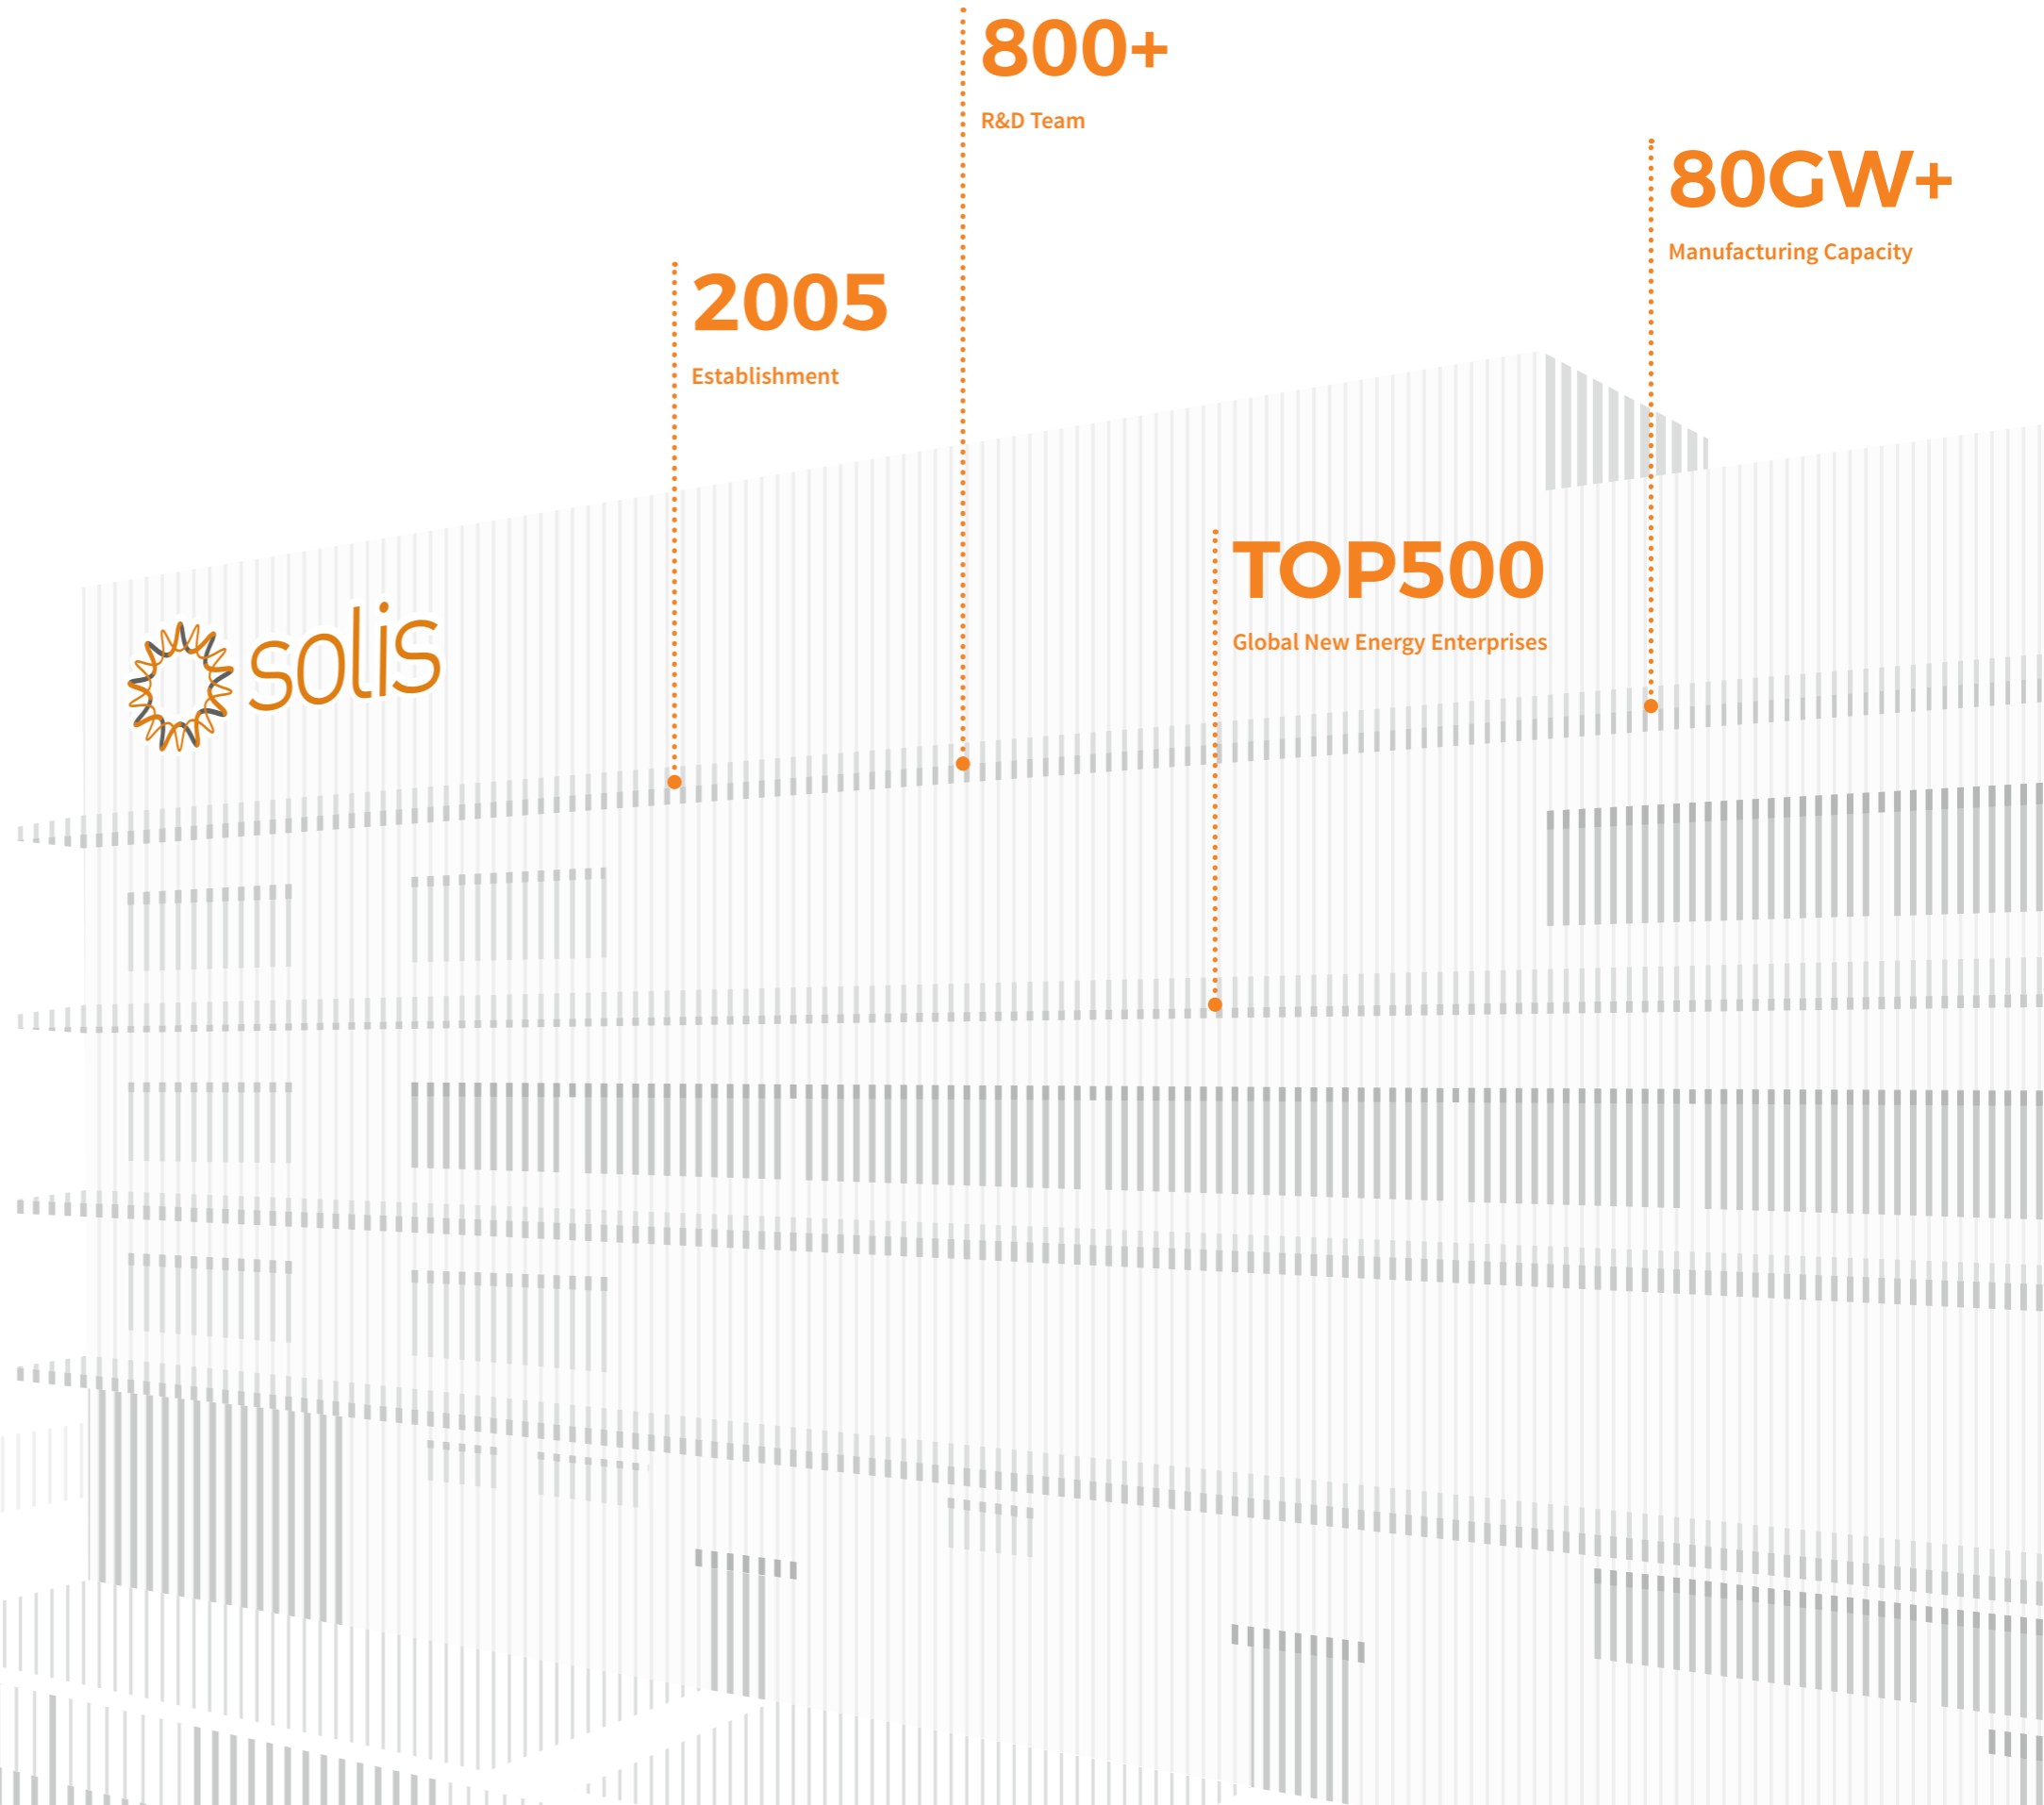

COMPANY HISTORY

2005

Ginlong Technologies established in Ningbo, China

2006

One of the first inverters certified to UK G83

2009

First Asian string inverter to achieve USA UL1741 certification

2010

Second Asian inverter certified to AS4777/AS 3100

2011

Ginlong hosted IEC61400 second annual meeting

2015

Ginlong inverter installed on the Eiffel Tower in Paris

Achieved top 12 inverter sales ranking in Europe

Earned third place ranking in China PV string inverter brand value (2015-2016)

2016

Listed by Asia PV innovation

Awarded Best Distribution Inverter Brand by PVBL

2017

Granted prestigious APVIA Technology Achievement Award (2017-2021)

2018

Single-phase string inverters ranked 2nd in global market shares (Wood Mackenzie)

2019

Ginlong (Solis) listed as a Public Company Stock Code: 300763.SZ

Ginlong (Solis) Ranked Third among Asian Brands by BloombergNEF Bankability

2020

Three-phase string inverters ranked 3rd in global market shares (Wood Mackenzie)

Ginlong Solis won PVBL 2019 Annual Top Global PV Brand Award

2021

National Enterprise Technology Center

Ranked among the top 500 global new energy companies

National technological innovation demonstration enterprise

Excellent after-sales service system certification

Sixth batch of individual champions in 2021 by (MIIT)

2022

The World's 3rd Largest PV Inverter Manufacturer (2021-2022)

No.2 PV Inverter Supplier Among Listed Companies in Shipments in China

National laboratory qualification CNAS certification

2023

Forbes China's Top 50 Innovative Enterprises

2024

Ranks among the top PV brands by EUPD research for 9 consecutive years (2016-2024)



锦浪科技

锦浪科技股份有限公司
GINLONG TECHNOLOGIES CO.,LTD



35 Service Centers

With 35 offices and service centers around the world, including the UK, France, Italy, Netherlands, Spain, Poland, Sweden, Turkey, Germany, Lithuania, Switzerland, Greece, Portugal, Ireland, Austria, Romania, South Africa, China, India, Indonesia, Korea, Myanmar, Malaysia, Philippines, Pakistan, Singapore, Sri Lanka, Thailand, Vietnam, Australia, Brazil, USA, Canada, Mexico and Chile, Solis has a well-established and expanding global presence.

HQ

Service Centers



GLOBAL REACH LOCAL EXPERTISE

CONTENTS

P11

Residential Energy Storage Solutions

The Solis residential energy storage family, covers single-phase and three-phase application scenarios. It aims to provide energy storage solutions for PV systems to achieve the goal of residential zero-carbon green electricity. The power range covers 3kW - 10kW.

P41

Commercial Energy Storage Solutions

Solis commercial storage product S6-EH3P(29.9-50)K-H-AU, is a highly integrated three-phase energy storage inverter, it has multiple functions, high safety level, strong energy supply reliability, which is a powerful tool for commercial PV energy storage projects.

P27

Residential Solar PV Solutions

Solis residential string inverters are cost-effective and efficient residential green power leaders, providing smarter green power solutions for your residential buildings.

P45

Commercial & Industrial Solar PV Solutions

Solis' C&I string inverter product line is broad with a power range cover 25kW - 125kW, providing you with the best industry green power solutions.

P55

Utility Scale Solar PV Solutions

Solis has optimized and innovated the whole process of utility solar PV solutions, integrated PV system design, digital management, and IoT technology.

P65

SolisCloud: Intelligent Solar Energy System Monitoring

The SolisCloud intelligent monitoring system includes hardware and software products and is a comprehensive energy management solution. Hardware products, including data stick, data box, EPM and PLC, etc; transmit to SolisCloud online energy

P61

Export Power Management Solutions

In some countries, local regulations limit the amount of PV power that can be exported to the grid or allow no export. Solis offers two export limitation solutions for single and multiple inverters system.

management platform. Real-time monitoring, visualized management and remote O & M of residential, C&I and utility scale solar PV plants.

Residential Energy Storage Solutions



The Solis residential energy storage family has abundant products, covering single-phase and three-phase application scenarios. It aims to provide energy storage solutions for PV systems to achieve the goal of real residential zero-carbon green electricity. The power range covers 3kW - 10kW. We can according to the requirements of your project application scenarios, rely on our flexible products to provide you with the best residential zero-carbon green power solutions.

Models:


- S5-EH1P(3-6)K-L
- S6-EH1P(3-6)K-L-AU
- S6-EH1P(3-6)K-L-PRO
- S6-EH1P8K-L-PRO
- RHI-3P(5-10)K-HVES-5G
- S6-EH3P(5-10)K-H-AU
- S6-EA1P(3.6-6)K-L

Output:

3 kW - 10 kW


Residential Energy Storage Solution - S6 series

Generator on Grid side

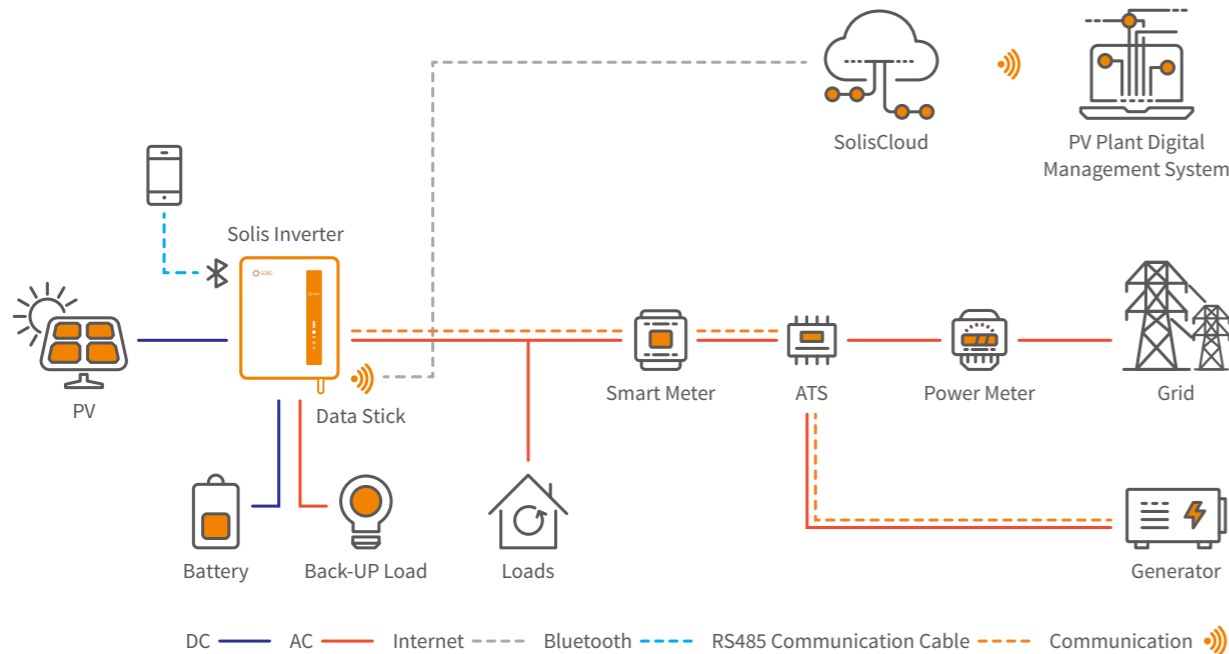

Residential Energy Storage Solution - S6-L-PRO series

Generator on Gen port side

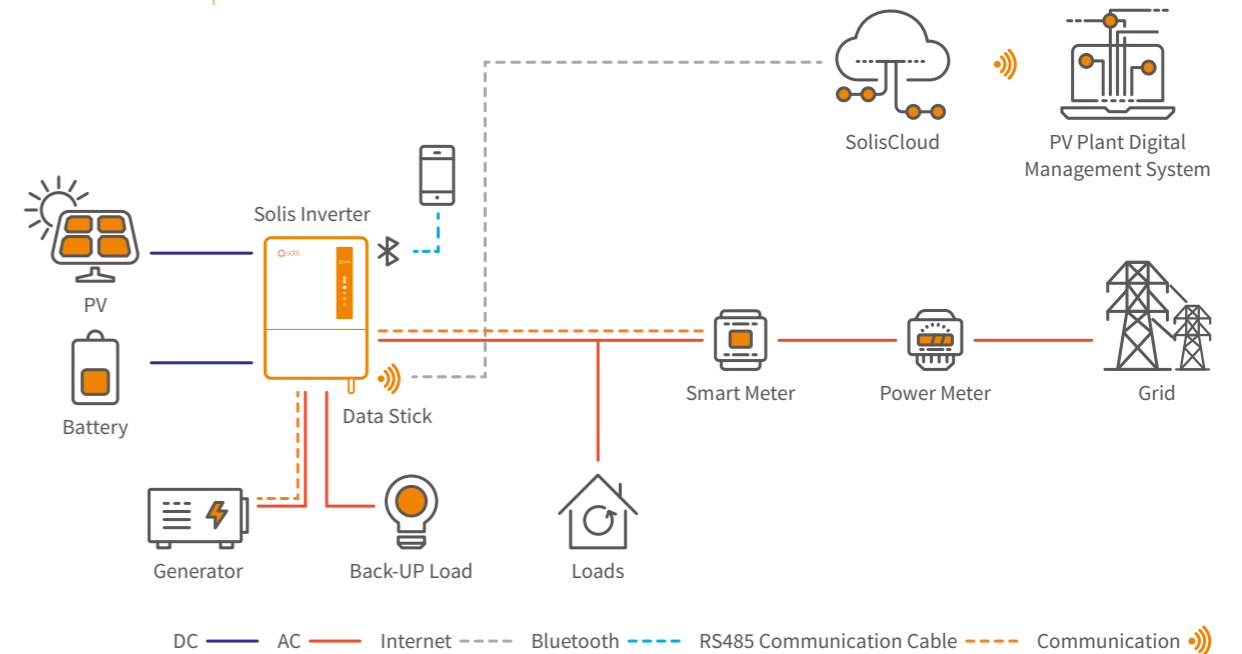

S5-EH1P(3-6)K-L

Solis Single Phase Low Voltage Energy Storage Inverters

Features:

- Max. string input current 15A
- Uninterrupted power supply, 20ms reaction
- 5kW backup power to support more important loads
- Multiple working modes to make maximize self-consumption, increase benefit
- Higher charge-discharge efficiency, improving the economic benefits
- AFCI protection, proactively reduces fire risk
- Fanless design, long lifespan
- Compatible with lithium & lead-acid batteries, increased more choice in different markets
- Intelligent EMS function, improving battery's reliability
- 24-hour fully intelligent energy management, Real-time grasp of PV plant status
- Remotely control & upgrade function, making digital power plant maintenance at your fingertips

Models:

S5-EH1P3K-L / S5-EH1P3.6K-L

S5-EH1P4.6K-L / S5-EH1P5K-L

S5-EH1P6K-L



360° View

• Wi-Fi communication dongle included

DATASHEET

S5-EH1P(3-6)K-L

Models	3K	3.6K	4.6K	5K	6K
Input DC (PV side)					
Recommended max. PV array size	6 kW	7.2 kW	9.2 kW	10 kW	12 kW
Max. usable PV input power	4.8 kW	5.7 kW	8 kW	8 kW	8 kW
Max. input voltage	600 V				
Rated voltage	330 V				
Start-up voltage	120 V				
MPPT voltage range	90-520 V				
Max. input current	15 A / 15 A				
Max. short circuit current	22.5 A / 22.5 A				
MPPT number/Max. input strings number	2/2				
Battery					
Battery type	Li-ion / Lead-acid				
Battery voltage range	42 - 58 V				
Battery capacity	50 - 2000 Ah				
Max. charge / discharge power	3 kW		5 kW		
Max. charge / discharge current	62.5 A		100 A		
Communication	CAN				
Output AC (Back-up)					
Rated output power	3 kW		5 kW		
Max. apparent output power	4.5 kVA, 10 sec		7 kVA, 10 sec		
Back-up switch time	<20 ms				
Rated output voltage	1/N/PE, 230 V				
Rated frequency	50 Hz				
Rated output current	13.5 A		22 A		
THDv (@linear load)	<2%				
Input AC (Grid side)					
Input voltage range	187-265 V				
Max. input current	20.5 A	25 A	31.5 A	34.5 A	34.5 A
Frequency range	45-55 Hz				
Output AC (Grid side)					
Rated output power	3 kW	3.6 kW	4.6 kW	5 kW	6 kW
Rated apparent output power	3 kVA	3.6 kVA	4.6 kVA	5 kVA	6 kVA
Max. apparent output power	3 kVA	3.6 kVA	4.6 kVA	5 kVA	6 kVA
Operation phase	1/N/PE				
Rated grid voltage	230 V				
Rated grid frequency	50 Hz				
Rated grid output current	15 A	18.5 A	21 A	25 A	30 A
Max. output current	15 A	18.5 A	21 A	25 A	30 A
Inrush current	65 A 10 us				
Max. output fault current	65 A 10 us				
Max. output overcurrent protection	16 A	20 A	22 A	26 A	31 A
Power factor	>0.99 (0.8 leading - 0.8 lagging)				
THDi	<2%				
Efficiency					
Max. efficiency	>97.1%				
EU efficiency	>96.5%				
Protection					
DC reverse-polarity protection	Yes				
Short circuit protection	Yes				
Output over current protection	Yes				
Surge protection	DC Type II / AC Type II				
Ground fault monitoring	Yes				
Integrated AFCI (DC arc-fault circuit protection)	Yes ⁽¹⁾				
Protection class/Over voltage category	I / II (PV), II (battery), III (AC)				
Integrated DC switch	Yes (PV2 Switch)				
General Data					
Dimensions (W*H*D)	333*505*249 mm				
Weight	17.9 kg		18.1 kg		
Topology	Non-isolated				
Operating ambient temperature range	-25 ~ +60°C				
Ingress protection	IP65				
Cooling concept	Natural convection				
Max. operation altitude	3000 m				
Grid connection standard	G98 or G99, VDE-AR-N 4105/VDE V 0124, EN 50549-1, VDE 0126/UTE C 15/VFR:2019, RD 1699/RD 244/UNE 206006/UNE 206007-1, CEI 0-21, C.10/11, NRS 097-2-1, EIFS 2018.2, IEC 62116, IEC 61727, IEC 60068, IEC 61683, EN 50530, MEA, PEA				
Safety/EMC standard	IEC/EN 62109-1/-2, EN 61000-6-2/-3				
Features					
DC connection	MC4 connector				
AC connection	Quick connection plug				
Display	7.0"LCD color screen display				
Communication	RS485, Optional: Wi-Fi, GPRS				
Country of manufacture	China				

(1) Activation required.

S6-EH1P(3-6)K-L-AU

Solis Single Phase Low Voltage Energy Storage Inverters

Features:

- Integrated 2 MPPTs for multiple array orientations
- Industry leading 125A/6kW max charge/discharge rating
- Automatic UPS switching
- Supports Peak Shaving Mode
- Pre-made Battery, Meter and CAN cabling to reduce installation time
- Compatible with multiple brands of lithium battery models
- Increased battery protection and operation features to extend battery life

Models:

S6-EH1P3K-L-AU / S6-EH1P3.6K-L-AU

S6-EH1P4.6K-L-AU / S6-EH1P5K-L-AU

S6-EH1P6K-L-AU



360° View

• Monitoring Portal – www.soliscloud.com or SolisCloud App • Compatible Batteries – Check online at www.solisinverters.com.au

DATASHEET

S6-EH1P(3-6)K-L-AU

Models	3K	3.6K	4.6K	5K	6K
Input DC (PV side)					
Recommended max. PV power	4.8 kW	5.7 kW	7 kW	8 kW	9.6 kW
Max. input voltage	600 V				
Rated voltage	330 V				
Start-up voltage	90 V				
MPPT voltage range	90-520 V				
Max. input current	16 A / 16 A				
Max. short circuit current	24 A / 24 A				
MPPT number/Max. input strings number	2/2				
Battery					
Battery type	Li-ion / Lead-acid				
Battery voltage range	42 - 58 V				
Battery capacity	50 - 2000 Ah				
Max. charge / discharge power	3 kW	3.6 kW	4.6 kW	5 kW	6 kW
Max. charge / discharge current	62.5 A	75 A	100 A	105 A	125 A
Communication	CAN				
Output AC (Grid side)					
Rated output power	3 kW	3.6 kW	4.6 kW	5 kW	6 kW
Max. apparent output power	3 kVA	3.6 kVA	4.6 kVA	5 kVA	6 kVA
Operation phase	1/N/PE				
Rated grid voltage	230 V				
Rated grid frequency	50 Hz				
Rated grid output current	13.0 A	15.7 A	20 A	21.7 A	26.1 A
Max. output current	13.0 A	15.7 A	20 A	21.7 A	26.1 A
Power factor	>0.99 (0.8 leading - 0.8 lagging)				
THDi	3%				
Input AC (Grid side)					
Rated voltage	230 V				
Max. input current	20 A	24.6 A	31.4 A	32 A	40 A
Frequency range	50 Hz				
Output AC (Back-up)					
Rated output power	3 kW	3.6 kW	4.6 kW	5 kW	6 kW
Max. apparent output power	4.2 kVA, 60 sec	5 kVA, 60 sec	6.4 kVA, 60 sec	7 kVA, 60 sec	8 kVA, 60 sec
Back-up switch time	<10 ms				
Rated output voltage	1/N/PE, 230 V				
Rated frequency	50 Hz				
Rated. output current	13.0 A	15.7 A	20 A	21.7A	26.1 A
THDv (@linear load)	3%				
Efficiency					
Max. efficiency	> 97.0%		> 97.5%		
EU efficiency	> 96.2%				
BAT charged by PV Max. efficiency	> 94.9%				
BAT charged/discharged to AC Max. efficiency	> 94.33%/93.51%				
Protection					
DC reverse-polarity protection	Yes				
Ground fault monitoring	Yes				
Integrated AFCI (DC arc-fault circuit protection)	Yes ⁽¹⁾				
Protection class/Over voltage category	I/II				
General Data					
Dimensions (W*H*D)	405*480*205 mm				
Weight	20.3 kg		22.4 kg		
Topology	Non-Isolated				
Operating ambient temperature range	-25 ~ +60°C				
Ingress protection	IP66				
Cooling concept	Natural convection				
Max. operation altitude	3000 m				
Grid connection standard	G98 or G99, VDE-AR-N 4105 / VDE V 0124, EN 50549-1, VDE 0126 / UTE C 15 / VFR:2019, RD 1699 / RD 244 / UNE 206006 / UNE 206007-1, CEI 0-21, C10/11, NRS 097-2-1, TOR, EIFS 2018.2, IEC 62116, IEC 61727, IEC 60068, IEC 61683, EN 50530, MEA, PEA				
Safety/EMC standard	IEC/EN 62109-1/-2, EN 61000-6-1/-2/-3/-4				
Features					
DC connection	MC4 connector				
AC connection	Quick connection plug				
Display	LED + APP				
Communication	RS485, CAN, Optional: Wi-Fi, GPRS, LAN				
Country of manufacture	China				

(1) Activation required.

S6-EH1P(3-6)K-L-PRO

Solis Single Phase Low Voltage Energy Storage Inverters

New PRO model provides solutions for demanding power scenarios

Features:

- Generator connectivity with multiple input methods and automatic generator On/Off control
- Automatic UPS switching
- 10 second 200% surge power backup overload capability
- Supports 1ph and 3ph flexible connection with max 36kW in parallel
- Up to 135A max charge/discharge current
- 6 customisable charge/discharge time settings
- Compatible with lead-acid and lithium batteries, with multiple battery protection features
- Supports peak shaving control in both "self-use" and "generator" mode

Models:

S6-EH1P3K-L-PRO / S6-EH1P3.6K-L-PRO

S6-EH1P5K-L-PRO / S6-EH1P6K-L-PRO



DATASHEET

S6-EH1P(3-6)K-L-PRO

Models	3K	3.6K	5K	6K
Input DC (PV side)				
Recommended max. PV array size	6 kW	7.2 kW	10 kW	12 kW
Max. usable PV input power	4.8 kW	5.76 kW	8 kW	9.6 kW
Max. input voltage	600 V			
Rated voltage	330 V			
Start-up voltage	90 V			
MPPT voltage range	90-520 V			
Max. input current	16 A / 16 A			
Max. short circuit current	24 A / 24 A			
MPPT number/Max. input strings number	2/2			
Battery				
Battery type	Li-ion / Lead-acid			
Battery voltage range	40-60 V			
Max. charge / discharge power	3 kW	3.6 kW	5 kW	6 kW
Max. charge / discharge current	70 A	80 A	112 A	135 A
Communication	CAN/RS485			
Output AC (Grid side)				
Rated output power	3 kW	3.6 kW	5 kW	6 kW
Max. apparent output power	3.3 kVA	4 kVA	5.5 kVA	6.6 kVA
Operation phase	1/N/PE			
Rated grid voltage	220 V / 230 V			
Rated grid frequency	50 Hz			
Rated grid output current	13.6 A / 13.0 A	16.4 A / 15.7 A	22.7 A / 21.7 A	27.3 A / 26.1 A
Max. output current	15 A	20 A	25 A	30 A
Power factor	>0.99 (0.8 leading - 0.8 lagging)			
THDi	<2%			
Input AC (Grid side)				
Input voltage range	187-253 V			
Max. input current	20 A	25 A	32 A	40 A
Frequency range	45-55 Hz / 55-65 Hz			
Output AC (Back-up)				
Rated output power	3 kW	3.6 kW	5 kW	6 kW
Max. apparent output power	2 times of rated power, 10 s			
Back-up switch time	<4 ms			
Rated output voltage	1/N/PE, 220 V / 230 V			
Rated frequency	50 Hz			
Rated output current	13.6 A / 13.0 A	16.4 A / 15.7 A	22.7 A / 21.7 A	27.3 A / 26.1 A
Max. output current	15 A	20 A	25 A	30 A
Max. AC Passthrough current	35 A		40 A	
THDv (@linear load)	<2%			
Efficiency				
Max. efficiency	> 96.9%			
EU efficiency	> 96.5%			
Protection				
DC reverse-polarity protection	Yes			
Ground fault monitoring	Yes			
Integrated AFCI (DC arc-fault circuit protection)	Yes ⁽¹⁾			
Protection class/Over voltage category	I/II (PV and BAT), III (MAINS and BACKUP and GEN)			
General Data				
Dimensions (W*H*D)	406*560*205 mm			
Weight	24 kg			
Topology	High frequency isolation (for battery)			
Operating ambient temperature range	-40 ~ +60°C			
Ingress protection	IP66			
Cooling concept	Natural convection			
Max. operation altitude	4000 m			
Grid connection standard	NRS 097-2-1, IEC 62116, IEC 61727, IEC 60068, IEC 61683, EN 50530, MEA, PEA			
Safety/EMC standard	IEC/EN 62109-1/-2, EN 61000-6-2/-3			
Features				
DC connection	MC4 plug (PV port) / Terminal Block (BAT port)			
AC connection	Terminal Block			
Display	LED + APP			
Communication	RS485, CAN, Optional: Wi-Fi, GPRS, LAN			
Country of manufacture	China			

(1) Activation required.

S6-EH1P8K-L-PRO

Solis Single Phase Low Voltage Energy Storage Inverters

New PRO model provides solutions for demanding power scenarios

Features:

- Generator connectivity with multiple input methods and automatic generator On/Off control
- Automatic UPS switching
- 10 second 200% surge power backup overload capability
- Supports 1ph and 3ph flexible connection with max 48kW in parallel
- Up to 190A max charge/discharge current
- 6 customisable charge/discharge time settings
- Compatible with lead-acid and lithium batteries, with multiple battery protection features
- Supports peak shaving control in both "self-use" and "generator" mode

Models:

S6-EH1P8K-L-PRO



DATASHEET

S6-EH1P8K-L-PRO

Models	8K
Input DC (PV side)	
Recommended max. PV array size	16 kW
Max. usable PV input power	12.8 kW
Max. input voltage	600 V
Rated voltage	330 V
Start-up voltage	90 V
MPPT voltage range	90-520 V
Max. input current	32 A / 20 A
Max. short circuit current	36 A / 30 A
MPPT number/Max. input strings number	2/3
Battery	
Battery type	Li-ion / Lead-acid
Battery voltage range	40-60 V
Max. charge / discharge power	8 kW
Max. charge / discharge current	190 A
Communication	CAN/RS485
Output AC (Grid side)	
Rated output power	8 kW
Max. apparent output power	8.8 kVA
Operation phase	1/N/PE
Rated grid voltage	220 V / 230 V
Rated grid frequency	50 Hz
Rated grid output current	36.4 A / 34.8 A
Max. output current	40 A
Power factor	>0.99 (0.8 leading - 0.8 lagging)
THDi	<2%
Input AC (Grid side)	
Input voltage range	187-253 V
Max. input current	50 A
Frequency range	45-55 Hz / 55-65 Hz
Output AC (Back-up)	
Rated output power	8 kW
Max. apparent output power	2 times of rated power, 10 s
Back-up switch time	<4 ms
Rated output voltage	1/N/PE, 220 V / 230 V
Rated frequency	50 Hz
Rated output current	36.4 A / 34.8 A
Max. output current	40 A
Max. AC Passthrough current	50 A
THDv (@linear load)	<2%
Efficiency	
Max. efficiency	> 96.9%
EU efficiency	> 96.5%
Protection	
DC reverse-polarity protection	Yes
Ground fault monitoring	Yes
Integrated AFCI (DC arc-fault circuit protection)	Yes ⁽¹⁾
Protection class/Over voltage category	I/II (PV and BAT), III (MAINS and BACKUP and GEN)
General Data	
Dimensions (W*H*D)	406*560*215 mm
Weight	26 kg
Topology	High frequency isolation (for battery)
Operating ambient temperature range	-40 ~ +60°C
Ingress protection	IP66
Cooling concept	Intelligent redundant fan-cooling
Max. operation altitude	4000 m
Grid connection standard	NRS 097-2-1, IEC 62116, IEC 61727, IEC 60068, IEC 61683, EN 50530, MEA, PEA
Safety/EMC standard	IEC/EN 62109-1/-2, EN 61000-6-2/-3
Features	
DC connection	MC4 plug (PV port) / Terminal Block (BAT port)
AC connection	Terminal Block
Display	LED + APP
Communication	RS485, CAN, Optional: Wi-Fi, GPRS, LAN
Country of manufacture	China

(1) Activation required.

RHI-3P(5-10)K-HVES-5G

Solis Three Phase High Voltage Energy Storage Inverters

Features:

- Max. efficiency 98.4%
- 2 MPPT and 4 DC input; Max 26A DC input current
- 3 operating modes (self-consumption; time-of-use; off-grid back-up) & programmable energy management
- Power supply can be switched automatically and switching time within 40ms
- Ensures AC backup for up to 10kW of continuous power and 16kVA of peak power
- Time of use shifting and peak shaving capabilities to grid
- AFCI protection, proactively reduces fire risk
- Intelligent EMS function
- Support three-phase imbalance on backup output port
- 24-hour fully intelligent energy management, Real-time grasp of PV plant status
- Remotely control & upgrade function, making digital power plant maintenance at your fingertips

Models:

RHI-3P5K-HVES-5G / RHI-3P6K-HVES-5G
 RHI-3P8K-HVES-5G / RHI-3P10K-HVES-5G



• Wi-Fi communication dongle included

DATASHEET

RHI-3P(5-10)K-HVES-5G

Models	5K	6K	8K	10K
Input DC (PV side)				
Recommended max. PV power	8 kW	9.6 kW	12.8 kW	16 kW
Max. input voltage	1000 V			
Rated voltage	600 V			
Start-up voltage	160 V			
MPPT voltage range	200-850 V			
Max. input current	13 A / 13 A		26 A / 13 A	
Max. short circuit current	16.5 A / 16.5 A		32.5 A / 16.5 A	
MPPT number/Max. input strings number	2/2		2/3	
Battery				
Battery type	Li-ion			
Battery voltage range	160-600 V			
Max. charge / discharge power	5 kW	6 kW	8 kW	10 kW
Max. charge / discharge current	25 A			
Communication	CAN			
Input AC (Grid side)				
Input voltage range	320-480 V			
Max. apparent input power	5 kVA	6 kVA	8 kVA	10 kVA
Max. input current	25 A			
Frequency range	45-55 Hz / 55-65 Hz			
Output AC (Grid side)				
Rated output power	5 kW	6 kW	8 kW	10 kW
Rated apparent output power	5 kVA	6 kVA	8 kVA	10 kVA
Max. apparent output power	5 kVA	6 kVA	8 kVA	10 kVA
Operation phase	3/N/PE			
Rated grid voltage	400 V			
Rated grid frequency	50 Hz			
Rated grid output current	8.4 A	10 A	13.4 A	16.7 A
Max. output current	8.4 A	10 A	13.4 A	16.7 A
Max. output overcurrent protection	31.8 A			
Power factor	>0.99 (0.8 leading - 0.8 lagging)			
THDi	<2%			
Output AC (Back-up)				
Rated output power	5 kW	6 kW	8 kW	10 kW
Peak apparent output power	10 kVA, 60 sec	12 kVA, 60 sec	16 kVA, 60 sec	16 kVA, 60 sec
Back-up switch time	< 40 ms			
Rated output voltage	3/N/PE, 400 V			
Rated frequency	50 Hz			
Rated output current	7.3 A	8.7 A	11.6 A	14.5 A
THDv (@linear load)	<2%			
Efficiency				
Max. efficiency	98.4%			
EU efficiency	97.7%			
MPPT efficiency	99.9%			
Battery charge/discharge efficiency	97.5%			
Protection				
Anti-islanding protection	Yes			
Output over current protection	Yes			
Short circuit protection	Yes			
Integrated AFCI (DC arc-fault circuit protection)	Yes ⁽¹⁾			
Integrated DC switch	Optional			
DC reverse-polarity protection	Yes			
PV over voltage protection	Yes			
Battery reverse protection	Yes			
General Data				
Dimensions (W*H*D)	535*455*185 mm			
Weight	25.1 kg			
Topology	Non-isolated			
Standby consumption	<15 W			
Operating ambient temperature range	-25 ~ +60°C			
Relative humidity	0-100%			
Ingress protection	IP65			
Cooling concept	Natural convection			
Max. operation altitude	4000 m			
Grid connection standard	AS/NZS 4777.2:2020, IEC 62116, IEC 61727, IEC 60068, IEC 61683, EN 50530			
Safety/EMC standard	IEC 62109-1/2, IEC 61000-6-1/-3			
Features				
DC connection	MC4 connector			
AC connection	Quick connection plug			
Display	LCD			
Communication	RS485, Optional: Wi-Fi, GPRS			
Country of manufacture	China			

(1) Activation required.

S6-EH3P(5-10)K-H-AU


Solis Three Phase High Voltage Energy Storage Inverters

Highly Flexible

- Integrated 3 or 4 MPPTs for multiple array orientations
- Industry leading 50A/10kW max charge/discharge rating
- Automatic UPS switching
- Supports Peak Shaving Mode
- Pre-made Battery, Meter and CAN cabling to reduce installation time
- Supports Unbalanced and Half-Wave Loads on both the Grid and Backup Port
- Compatible with multiple brands of lithium battery models
- Increased battery protection and operation features to extend battery life

Models:

S6-EH3P5K-H-AU / S6-EH3P6K-H-AU
 S6-EH3P8K-H-AU / S6-EH3P10K-H-AU



360° View

• Monitoring Portal – www.soliscloud.com or SolisCloud App • Compatible Batteries – Check online at www.solisinverters.com.au

DATASHEET

S6-EH3P(5-10)K-H-AU

Models	5K	6K	8K	10K
Input DC (PV side)				
Recommended max. PV array size	6.6 kW	7.9 kW	10.6 kW	13.3 kW
Max. usable PV input power	6.6 kW	7.9 kW	10.6 kW	13.3 kW
Max. input voltage	1000 V			
Rated voltage	600 V			
Start-up voltage	160 V			
MPPT voltage range	200-850 V			
Max. input current	16 A / 16 A / 16 A		16 A / 16 A / 16 A / 16 A	
Max. short circuit current	24 A / 24 A / 24 A		24 A / 24 A / 24 A / 24 A	
MPPT number/Max. input strings number	3/3		4/4	
Battery				
Battery type	Li-ion			
Battery voltage range	120-600 V			
Max. charge / discharge power	5 kW	6 kW	8 kW	10 kW
Max. charge / discharge current	25 A		50 A	
Communication	CAN/RS485			
Output AC (Grid side)				
Rated output power	5 kW	6 kW	8 kW	10 kW
Max. apparent output power	5 kVA	6 kVA	8 kVA	10 kVA
Rated grid voltage	3/N/PE, 380 V / 400 V			
Rated grid frequency	50 Hz			
Rated grid output current	7.6 A / 7.2 A	9.1 A / 8.7 A	12.2 A / 11.5 A	15.2 A / 14.4 A
Max. output current	7.6 A / 7.2 A	9.1 A / 8.7 A	12.2 A / 11.5 A	15.2 A / 14.4 A
Power factor	>0.99 (0.8 leading - 0.8 lagging)			
THDi	<3%			
Input AC (Grid side)				
Max. input power	7.5 kW	9 kW	12 kW	15 kW
Rated input current	11.4 A	13.8 A	18.2 A	22.8 A
Rated input voltage	3/N/PE, 380 V / 400 V			
Rated input frequency	50 Hz			
Output AC (Back-up)				
Rated output power	5 kW	6 kW	8 kW	10 kW
Max. apparent output power	8 kVA, 60 sec	9.6 kVA, 60 sec	12.8 kVA, 60 sec	16 kVA, 60 sec
Back-up switch time	<10 ms			
Rated output voltage	3/N/PE, 380 V / 400 V			
Rated frequency	50 Hz			
Rated output current	7.6 A / 7.2 A	9.1 A / 8.7 A	12.2 A / 11.5 A	15.2 A / 14.4 A
THDv (@linear load)	<2%			
Efficiency				
Max. efficiency	96.5%	97.0%	97.5%	97.9%
EU efficiency	96.8%	97.1%	97.4%	97.5%
BAT charged by PV Max. efficiency	98.4%	98.5%	98.2%	98.3%
BAT charged/discharged to AC Max. efficiency	97.3%	97.3%	97.5%	97.5%
Protection				
Anti-islanding protection	Yes			
Output over current protection	Yes			
Short circuit protection	Yes			
Integrated AFCI (DC arc-fault circuit protection)	Yes ⁽¹⁾			
Integrated DC switch	Yes			
DC reverse-polarity protection	Yes			
PV over voltage protection	Yes			
Battery reverse protection	Yes			
General Data				
Dimensions (W*H*D)	600*500*210 mm		600*500*230 mm	
Weight	27.6 kg		30.2 kg	
Topology	Transformerless			
Self-consumption (night)	<25 W			
Operating ambient temperature range	-25 ~ +60°C			
Relative humidity	0-95%			
Ingress protection	IP66			
Cooling concept	Natural convection			
Max. operation altitude	4000 m			
Grid connection standard	G98 or G99, VDE-AR-N 4105 / VDE V 0124, EN 50549-1, VDE 0126 / UTE C 15/VFR:2019, RD 1699/RD 244 / UNE 206006 / UNE 206007-1, CEI 0-21, C10/11, NRS 097-2-1, TOR, EIFS 2018.2, IEC 62116, IEC 61727, IEC 60068, IEC 61683, EN 50530, MEA, PEA			
Safety/EMC standard	IEC/EN 62109-1/-2, IEC/EN 61000-6-1/-3			
Features				
PV connection	MC4 connector			
Battery connection	Quick connection plug			
AC connection	Quick connection plug			
Display	LED + Bluetooth + APP			
Communication	CAN, RS485, Optional: Wi-Fi, Cellular, LAN			
Country of manufacture	China			

(1) Activation required.

S6-EA1P(3.6-6)K-L

Solis Single Phase Low Voltage AC-Coupled Inverters

Features:

- Supports Peak Shaving Mode
- Industry leading 125A/6kW max charge/discharge rating
- Provide intelligent time of use solution together with the monitoring group
- Compatible with multiple brands of lithium battery models
- 6 customisable charge/discharge time settings
- Increased battery protection and operation features to extend battery life

Models:

- S6-EA1P3.6K-L
- S6-EA1P4.6K-L
- S6-EA1P5K-L
- S6-EA1P6K-L



DATASHEET

S6-EA1P(3.6-6)K-L

Models	3.6K	4.6K	5K	6K
Battery				
Battery type	Li-ion			
Battery voltage range	40-60 V			
Max. charge / discharge current	75 A	96 A	105 A	125 A
Communication	CAN			
Output AC (Grid side)				
Rated output power	3.6 kW	4.6 kW	5 kW	6 kW
Max. apparent output power	3.6 kVA	4.6 kVA	5 kVA	6 kVA
Operation phase	1/N/PE			
Rated grid voltage	220 V / 230 V			
Grid voltage range	187-253 V			
Rated grid frequency	50 Hz			
Rated grid output current	16.4 A / 15.7 A	21 A / 20 A	22.8 A / 21.8 A	27.3 A / 26.1 A
Max. output current	16.4 A / 15.7 A	21 A / 20 A	22.8 A / 21.8 A	27.3 A / 26.1 A
Power factor	>0.99 (0.8 leading - 0.8 lagging)			
THDi	<3%			
Input AC (Grid side)				
Input voltage range	187-253 V			
Max. input current	16.4 A / 15.7 A	21 A / 20 A	22.8 A / 21.8 A	27.3 A / 26.1 A
Max. input power	3.6 kW	4.6 kW	5 kW	6 kW
Frequency range	45-55 Hz / 55-65 Hz			
Efficiency				
BAT charged/discharged to AC Max. efficiency	> 93.5%			
Protection				
Protection class	I			
Over voltage category	DC II / AC III			
Battery reverse protection	Yes			
Battery over and under voltage protection	Yes			
Short circuit protection	Yes			
Output over current protection	Yes			
Temperature protection	Yes			
General Data				
Dimensions (W*H*D)	440*465*192 mm			
Weight	24.5 kg			
Topology	High frequency isolation			
Operating ambient temperature range	-25 ~ +60°C			
Relative humidity	0-95%			
Ingress protection	IP66			
Cooling concept	Natural convection			
Max. operation altitude	3000 m			
Grid connection standard	C10/11, 50549, G98, G99, VDE4105, AS4777.2, France			
Safety/EMC standard	IEC/EN 62109-1/-2, EN 61000-6-2/-3			
Features				
DC connection	Terminal Block			
AC connection	Quick connection plug			
Display	LED + APP			
Communication	RS485, CAN, Optional: Wi-Fi, LAN			
Country of manufacture	China			


Residential Solar PV Solutions



Solis residential string inverters are cost-effective and efficient green power leaders, providing smarter green power solutions for your residential buildings. A variety of models and solutions meet the needs of modern homes.

The portfolio includes single-phase and small three-phase string inverters, with a wide range of models, providing the best home green power solutions based on your application scenarios and specific needs. Solis Residential inverters are small and light, allowing for just one person to complete the installation. The overall design is sleek and modern, with low noise, particularly suitable for home installation without affecting people's daily activities. Via online or App, you can connect to SolisCloud for intelligent energy management. Simple operation and convenient. Solis residential solutions are technically advanced, flexible and simplify integration with digital home automation equipment and smart grids.

Residential Solar PV Solution

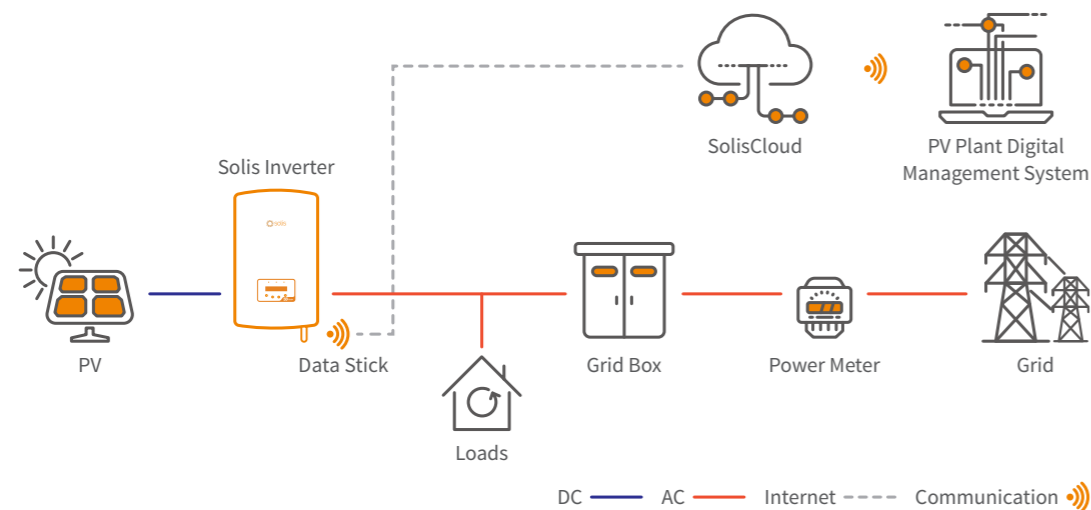

Models:

- S5-GR1P(0.7-3)K-M / S5-GR1P(3-6)K
- S6-GR1P(3-6)K-S / S5-GR1P(7-10)K
- S5-GR3P(5-20)K

Output:

0.7 kW - 20 kW

S5-GR1P(0.7-3)K-M

Solis Single Phase Grid-Tied Inverters

Features:

- Max. efficiency 97.1%
- Max. input current 14A
- Complies with all state network requirements
- Integrate with adjustable Volt-Watt and Volt-Var function
- DRM integrated, fully comply with AS/NZS 4777.2:2020
- Built-in DC-PV2 Switch, comply with AS/NZS 5033 requirements
- Support 24h consumption monitoring with a smart meter
- Super high frequency switching technology
- AFCI protection, proactively reduces fire risk
- Precise MPPT algorithm
- Integrated Export Power Manager (EPM)
- Compact and lightweight
- Voltage active power and reactive power

Models:

S5-GR1P0.7K-M / S5-GR1P1K-M

S5-GR1P1.5K-M / S5-GR1P2K-M

S5-GR1P2.5K-M / S5-GR1P3K-M



• Wi-Fi communication dongle included

DATASHEET

S5-GR1P(0.7-3)K-M

Models	0.7K	1K	1.5K	2K	2.5K	3K
Input DC						
Recommended max. PV power	0.93 kW	1.33 kW	2 kW	2.6 kW	3.33 kW	4 kW
Max. input voltage	600 V					
Rated voltage	200 V			330 V		
Start-up voltage	60 V			90 V		
MPPT voltage range	50-500 V			80-500 V		
Max. input current	14 A					
Max. short circuit current	22 A					
MPPT number/Max. input strings number	1/1					
Output AC						
Rated output power	0.7 kW	1 kW	1.5 kW	2 kW	2.5 kW	3 kW
Rated apparent output power	0.7 kVA	1 kVA	1.5 kVA	2 kVA	2.5 kVA	3 kVA
Max. apparent output power	0.7 kVA	1 kVA	1.5 kVA	2 kVA	2.5 kVA	3 kVA
Max. output power	0.7 kW	1 kW	1.5 kW	2 kW	2.5 kW	3 kW
Rated grid voltage	1/N/PE, 230 V					
Rated grid frequency	50 Hz					
Rated grid output current	4.4 A	5.2 A	8.1 A	10.5 A	13.3 A	15.7 A
Max. output current	4.4 A	5.2 A	8.1 A	10.5 A	13.3 A	15.7 A
Power factor	>0.99 (0.8 leading - 0.8 lagging)					
THDi	<3%					
Efficiency						
Max. efficiency	96.6%		96.6%	97.1%	97.1%	
EU efficiency	95.3%		95.4%	96.4%	96.7%	
Protection						
DC reverse-polarity protection	Yes					
Short circuit protection	Yes					
Output over current protection	Yes					
Surge protection	Yes					
Grid monitoring	Yes					
Anti-islanding protection	Yes					
Temperature protection	Yes					
Integrated AFCI (DC arc-fault circuit protection)	Yes ⁽¹⁾					
Integrated DC switch	Yes (PV2 Switch)					
General Data						
Dimensions (W*H*D)	310*373*160 mm					
Weight	7.4 kg			7.7 kg		
Topology	Transformerless					
Self-consumption (night)	<1 W					
Operating ambient temperature range	-25 ~ +60°C					
Relative humidity	0-100%					
Ingress protection	IP65					
Cooling concept	Natural convection					
Max. operation altitude	2000 m					
Grid connection standard	AS/NZS 4777.2:2020, IEC 62116, IEC 61727, IEC 60068, IEC 61683, EN 50530					
Safety/EMC standard	IEC 62109-1/-2, IEC 61000-6-1/-2/-3/-4					
Features						
DC connection	MC4 connector					
AC connection	Quick connection plug					
Display	LCD					
Communication	RS485, Optional: Wi-Fi, GPRS					
Country of manufacture	China					

(1) Activation required.

S5-GR1P(3-6)K

Solis Single Phase Grid-Tied Inverters

Features:

- Max. efficiency 97.7%
- Max. input current 14A
- Complies with all state network requirements
- Integrate with adjustable Volt-Watt and Volt-Var function
- DRM integrated, fully comply with AS/NZS 4777.2:2020
- Built-in DC-PV2 Switch, comply with AS/NZS 5033 requirements
- Support 24h consumption monitoring with a smart meter
- Super high frequency switching technology
- 2 MPPT design with precise MPPT algorithm
- AFCI protection, proactively reduces fire risk
- Integrated Export Power Manager(EPM)
- Compact and lightweight
- Voltage active power and reactive power

Models:

S5-GR1P3K / S5-GR1P3.6K

S5-GR1P4K / S5-GR1P4.6K

S5-GR1P5K / S5-GR1P6K



- Wi-Fi communication dongle included

DATASHEET

S5-GR1P(3-6)K

Models	3K	3.6K	4K	4.6K	5K	6K
Input DC						
Recommended max. PV power	4 kW	4.8 kW	5.3 kW	6.1 kW	6.7 kW	8 kW
Max. input voltage	600 V					
Rated voltage	330 V					
Start-up voltage	120 V					
MPPT voltage range	90-520 V					
Max. input current	14 A / 14 A					
Max. short circuit current	22 A / 22 A					
MPPT number/Max. input strings number	2/2					
Output AC						
Rated output power	3 kW	3.6 kW	4 kW	4.6 kW	5 kW	6 kW
Rated apparent output power	3 kVA	3.6 kVA	4 kVA	4.6 kVA	5 kVA	6 kVA
Max. apparent output power	3 kVA	3.6 kVA	4 kVA	4.6 kVA	5 kVA	6 kVA
Max. output power	3 kW	3.6 kW	4 kW	4.6 kW	5 kW	6 kW
Rated grid voltage	1/N/PE, 230 V					
Rated grid frequency	50 Hz					
Rated grid output current	15.7 A	16.0 A	21.0 A	23.8 A	25.0 A	27.3 A
Max. output current	15.7 A	16.0 A	21.0 A	23.8 A	25.0 A	27.3 A
Power factor	>0.99 (0.8 leading - 0.8 lagging)					
THDi	<3%					
Efficiency						
Max. efficiency	97.3%		97.6%		97.7%	
EU efficiency	96.6%		97.1%		97.1%	
Protection						
DC reverse-polarity protection	Yes					
Short circuit protection	Yes					
Output over current protection	Yes					
Surge protection	Yes					
Grid monitoring	Yes					
Anti-islanding protection	Yes					
Temperature protection	Yes					
Integrated AFCI (DC arc-fault circuit protection)	Yes ⁽¹⁾					
Integrated DC switch	Yes (PV2 Switch)					
General Data						
Dimensions (W*H*D)	310*543*160 mm					
Weight	11.2 kg			12 kg		
Topology	Transformerless					
Self-consumption (night)	<1 W					
Operating ambient temperature range	-25 ~ +60°C					
Relative humidity	0-100%					
Ingress protection	IP65					
Cooling concept	Natural convection					
Max. operation altitude	2000 m					
Grid connection standard	AS/NZS 4777.2:2020, IEC 62116, IEC 61727, IEC 60068, IEC 61683, EN 50530					
Safety/EMC standard	IEC 62109-1/-2, IEC 61000-6-2/-3					
Features						
DC connection	MC4 connector					
AC connection	Quick connection plug					
Display	LCD					
Communication	RS485, Optional: Wi-Fi, GPRS					
Country of manufacture	China					

(1) Activation required.

S6-GR1P(3-6)K-S

Solis Single Phase Grid-Tied Inverters

Features:

- String current up to 16A
- Integrated with zero export power control function
- Light weight with compact design for easy installation
- 2 MPPT design with precise MPPT algorithm

Models:

S6-GR1P3K-S / S6-GR1P3.6K-S

S6-GR1P4K-S / S6-GR1P4.6K-S

S6-GR1P5K-S / S6-GR1P6K-S



• Wi-Fi communication dongle included

DATASHEET

S6-GR1P(3-6)K-S

Models	3K	3.6K	4K	4.6K	5K	6K
Input DC						
Recommended max. PV power	4 kW	4.8 kW	5.3 kW	6.1 kW	6.7 kW	8 kW
Max. input voltage	550 V					
Rated voltage	330 V					
Start-up voltage	100 V					
MPPT voltage range	90-550 V					
Max. input current	16 A / 16 A					
Max. short circuit current	22 A / 22 A					
MPPT number/Max. input strings number	2/2					
Output AC						
Rated output power	3 kW	3.6 kW	4 kW	4.6 kW	5 kW	6 kW
Rated apparent output power	3 kVA	3.6 kVA	4 kVA	4.6 kVA	5 kVA	6 kVA
Max. apparent output power	3 kVA	3.6 kVA	4 kVA	4.6 kVA	5 kVA	6 kVA
Max. output power	3 kW	3.6 kW	4 kW	4.6 kW	5 kW	6 kW
Rated grid voltage	1/N/PE, 230 V					
Rated grid frequency	50 Hz					
Rated grid output current	13.0 A	15.7 A	17.4 A	20.0 A	21.7A	26.1 A
Max. output current	13.0 A	15.7 A	17.4 A	20.0 A	21.7A	26.1 A
Power factor	>0.99 (0.8 leading - 0.8 lagging)					
THDi	<3%					
Efficiency						
Max. efficiency	97.3%		97.6%		97.7%	
EU efficiency	96.6%		97.1%		97.1%	
Protection						
DC reverse-polarity protection	Yes					
Short circuit protection	Yes					
Output over current protection	Yes					
Surge protection	Yes					
Grid monitoring	Yes					
Anti-islanding protection	Yes					
Temperature protection	Yes					
Integrated AFCI (DC arc-fault circuit protection)	Yes ⁽¹⁾					
Integrated DC switch	Yes (PV2 Switch)					
General Data						
Dimensions (W*H*D)	330*371*161 mm					
Weight	8.3 kg		8.9 kg		9 kg	
Topology	Transformerless					
Self-consumption (night)	<1 W					
Operating ambient temperature range	-25 ~ +60°C					
Relative humidity	0-100%					
Ingress protection	IP66					
Cooling concept	Natural convection					
Max. operation altitude	4000 m					
Grid connection standard	AS/NZS 4777.2:2020, IEC 62116, IEC 61727, IEC 60068, IEC 61683, EN 50530					
Safety/EMC standard	IEC 62109-1/-2, IEC 61000-6-2/-3					
Features						
DC connection	MC4 connector					
AC connection	Quick connection plug					
Display	LED + APP					
Communication	RS485, USB, Optional: Wi-Fi, GPRS					
Country of manufacture	China					

(1) Activation required.

S5-GR1P(7-10)K

Solis Single Phase Grid-Tied Inverters

Features:

- Max. efficiency 98.0%
- Max. input current 14A
- Complies with all state network requirements
- Integrate with adjustable Volt-Watt and Volt-Var function
- DRM integrated, fully comply with AS/NZS 4777.2:2020
- Built-in DC-PV2 Switch, comply with AS/NZS 5033 requirements
- Support 24h consumption monitoring with a smart meter
- Super high frequency switching technology
- 3 MPPT design with precise MPPT algorithm
- AFCI protection, proactively reduces fire risk
- Integrated Export Power Manager(EPM)
- Compact and lightweight
- Voltage active power and reactive power

Models:

S5-GR1P7K / S5-GR1P8K

S5-GR1P9K / S5-GR1P10K



• Wi-Fi communication dongle included

DATASHEET

S5-GR1P(7-10)K

Models	7K	8K	9K	10K
Input DC				
Recommended max. PV power	9.3 kW	10.6 kW	12 kW	13.3 kW
Max. input voltage	600V			
Rated voltage	330V			
Start-up voltage	120V			
MPPT voltage range	100-500V			
Max. input current	14 A / 14 A / 14 A			
Max. short circuit current	22 A / 22 A / 22 A			
MPPT number/Max. input strings number	3/3			
Output AC				
Rated output power	7 kW	8 kW	9 kW	10 kW
Rated apparent output power	7 kVA	8 kVA	9 kVA	10 kVA
Max. apparent output power	7 kVA	8 kVA	9 kVA	10 kVA
Max. output power	7 kW	8 kW	9 kW	10 kW
Rated grid voltage	1/N/PE, 230 V			
Rated grid frequency	50 Hz			
Rated grid output current	33.7 A	36.6 A	41.3 A	45.9 A
Max. output current	33.7 A	36.6 A	41.3 A	45.9 A
Power factor	>0.99 (0.8 leading - 0.8 lagging)			
THDi	<3%			
Efficiency				
Max. efficiency	98.0%			
EU efficiency	97.1%			
Protection				
DC reverse-polarity protection	Yes			
Short circuit protection	Yes			
Output over current protection	Yes			
Surge protection	Yes			
Grid monitoring	Yes			
Anti-islanding protection	Yes			
Temperature protection	Yes			
Integrated AFCI (DC arc-fault circuit protection)	Yes ⁽¹⁾			
Integrated DC switch	Yes (PV2 Switch)			
General Data				
Dimensions (W*H*D)	333*579*253 mm			
Weight	18.5 kg			
Topology	Transformerless			
Self-consumption (night)	<1 W			
Operating ambient temperature range	-25 ~ +60°C			
Relative humidity	0-100%			
Ingress protection	IP66			
Cooling concept	Natural convection			
Max. operation altitude	4000 m			
Grid connection standard	AS/NZS 4777.2:2020, IEC 62116, IEC 61727, IEC 60068, IEC 61683, EN 50530			
Safety/EMC standard	IEC/EN 62109-1/-2, IEC/EN 61000-6-1/-2/-3/-4			
Features				
DC connection	MC4 connector			
AC connection	OT Terminal			
Display	LCD			
Communication	RS485, Optional: Wi-Fi, GPRS			
Country of manufacture	China			

(1) Activation required.

S5-GR3P(5-20)K

Solis Three Phase Grid-Tied Inverters

Efficient

- Max. efficiency 98.7%
- String current up to 16A
- Wide voltage range and low startup voltage

Smart

- Support export power control
- Support RS485, WiFi, GPRS
- Scan to register on SolisCloud, support remote upgrade and control

Safe

- IP66
- AFCI protection, proactively reduces fire risk
- Automatic voltage stabilization technology in weak grid condition

Economic

- Compact design with easy maintenance and installation
- > 130% DC/AC ratio
- Support large module with lower installation cost

Models:

S5-GR3P5K-AU / S5-GR3P6K-AU

S5-GR3P8K-AU / S5-GR3P9K-AU

S5-GR3P10K-AU / S5-GR3P12K

S5-GR3P13K / S5-GR3P15K

S5-GR3P17K / S5-GR3P20K



360° View



• Wi-Fi communication dongle included

DATASHEET

S5-GR3P(5-20)K

Models	5K-AU	6K-AU	8K-AU	9K-AU	10K-AU	12K	13K	15K	17K	20K	
Input DC											
Recommended max. PV power	6.7 kW	8 kW	10.6 kW	12 kW	13.3 kW	16 kW	17.3 kW	20 kW	22.6 kW	26.6 kW	
Max. input voltage	1100 V										
Rated voltage	600 V										
Start-up voltage	180 V										
MPPT voltage range	160-1000 V										
Max. input current	32 A / 16 A			32 A / 32 A							
Max. short circuit current	40 A / 20 A			40 A / 40 A							
MPPT number/Max. input strings number	2/2			2/4							
Output AC											
Rated output power	5 kW	6 kW	8 kW	9 kW	10 kW	12 kW	13 kW	15 kW	17 kW	20 kW	
Rated apparent output power	5 kVA	6 kVA	8 kVA	9 kVA	10 kVA	12 kVA	13 kVA	15 kVA	17 kVA	20 kVA	
Max. apparent output power	5 kVA	6 kVA	8 kVA	9 kVA	10 kVA	12 kVA	13 kVA	15 kVA	17 kVA	20 kVA	
Max. output power	5 kW	6 kW	8 kW	9 kW	10 kW	12 kW	13 kW	15 kW	17 kW	20 kW	
Rated grid voltage	3/N/PE, 230 V / 400 V										
Rated grid frequency	50 Hz										
Rated grid output current	7.9 A	9.5 A	12.7 A	14.3 A	15.9 A	19.1 A	20.7 A	23.8 A	27 A	31.8 A	
Max. output current	7.9 A	9.5 A	12.7 A	14.3 A	15.9 A	19.1 A	20.7 A	23.8 A	27 A	31.8 A	
Power factor	>0.99 (0.8 leading - 0.8 lagging)										
THDi	<2%										
Efficiency											
Max. efficiency	98.3%		98.5%			98.6%		98.7%		98.7%	
EU efficiency	97.7%		97.9%			98.0%		98.1%		98.1%	
Protection											
DC reverse-polarity protection	Yes										
Short circuit protection	Yes										
Output over current protection	Yes										
Surge protection	Yes										
Grid monitoring	Yes										
Anti-islanding protection	Yes										
Temperature protection	Yes										
Integrated AFCI (DC arc-fault circuit protection)	Yes ⁽¹⁾										
Integrated DC switch	Yes (PV2 Switch)										
General Data											
Dimensions (W*H*D)	310*563*219 mm										
Weight	18.9 kg			19.6 kg				20.8 kg			
Topology	Transformerless										
Self-consumption (night)	<1 W										
Operating ambient temperature range	-25 ~ +60°C										
Relative humidity	0-100%										
Ingress protection	IP66										
Cooling concept	Intelligent redundant fan-cooling										
Max. operation altitude	2000 m										
Grid connection standard	AS/NZS 4777.2:2020, IEC 62116, IEC 61727, IEC 60068, IEC 61683, EN 50530										
Safety/EMC standard	IEC 62109-1/-2, IEC 61000-6-1/-2/-3/-4										
Features											
DC connection	MC4 connector										
AC connection	Quick connection plug										
Display	LCD										
Communication	RS485, Optional: Wi-Fi, GPRS										
Country of manufacture	China										

(1) Activation required.

Residential Power Plant Case Study



📍 Finland
⚡ 6.7kW 📦 S5-GR3P(3-20)K



📍 USA
⚡ 16kW 📦 Solis-(2.5-6)K-4G-US

Microgrid Project in Hebei Province

This microgrid project in Hebei province uses Solis-3P(12-25)K-5G and Solis-(25-50)K-5G inverters. Through the configuration of an energy storage system, the project adopts the mode of "Self-use, surplus electricity exported & sold back to the grid". This has realized consumption of new green energy to the region and delivers a stable income of about 1.6 million yuan annually.

In addition, the system is monitored in real-time via the SolisCloud platform which offers intelligent digital functions, online system control, along with accurate operation and maintenance. This in turn makes power station management more efficient, convenient and cost effective.

This project demonstrates the technological progress and expansion of the solar industry, accelerating the development of clean, low-carbon energy.



📍 Australia
⚡ 8.2kW 📦 Solis-1P(2.5-6)K-4G



📍 UK
⚡ 2.8kW 📦 S6-GR1P(2.5-6)K



📍 China
⚡ 2.7MW
📦 GCI-3P(12-25)K-5G




Commercial Energy Storage Solutions



Solis commercial storage product S6-EH3P(29.9-50)K-H-AU, is a highly integrated three-phase energy storage inverter, it has multiple functions, high safety level, strong energy supply reliability, which is a powerful tool for commercial PV energy storage projects.

It has 4 MPPT design, PV string current up to 20A, can be adapted to a variety of high-efficiency high-power PV module, to meet a variety of complex commercial roof application requirements; At the same time, the product can be compatible with a variety of generators can automatically control the generator start and stop, and support the generator port function expansion, to achieve backup loads redundancy or grid-tied PV system coupling networking; the product supports up to 6 parallel operation, and contains rich security protection and intelligent control operation functions, which is very suitable for small enterprises PV energy storage needs.

Commercial Energy Storage Solution

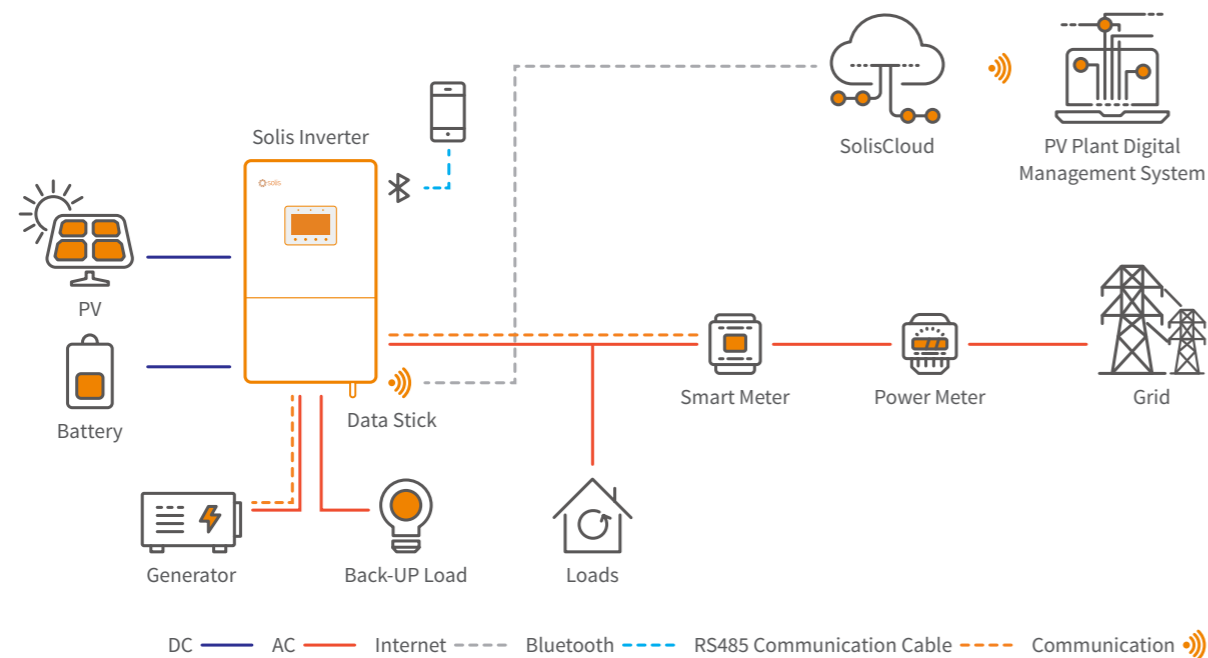

Models:

S6-EH3P(29.9-50)K-H-AU

Output:

29.9 kW - 50 kW

S6-EH3P(29.9-50)K-H-AU

Solis Three Phase High Voltage Energy Storage Inverters

Features:

- 4 MPPTs, 8 strings at 20A, and up to 96kW usable PV input
- 140A/70A+70A max charge/discharge on two independently controlled ports
- Supports 1.6 times rated output for 2 seconds on the backup port
- Supports parallel operation of up to 6 units for on and off-grid use
- Operates as a grid-tied inverter without batteries when on-grid
- Multi-input generator connectivity with automatic on/off control
- Supports peak shaving control in both "self-use" and "generator" mode
- Maximum usable PV input power reaches to 2 times rated power
- Maximum efficiency reaches to 97.8% and Ingress protection reaches to IP66

Models:

S6-EH3P29.9K-H-AU / S6-EH3P30K-H-AU

S6-EH3P40K-H-AU / S6-EH3P50K-H-AU



DATASHEET

S6-EH3P(29.9-50)K-H-AU

Models	29.9K	30K	40K	50K
Input DC (PV side)				
Recommended max. PV array size	59.8 kW	60 kW	80 kW	100 kW
Max. usable PV input power	59.8 kW	60 kW	80 kW	96 kW
Max. input voltage	1000 V			
Rated voltage	600 V			
Start-up voltage	180 V			
MPPT voltage range	150-850 V			
Max. input current	3*40 A		4*40 A	
Max. short circuit current	3*60 A		4*60 A	
MPPT number/Max. input strings number	3/6		4/8	
Battery				
Battery type	Li-ion			
Battery voltage range	150-800 V			
Max. charge / discharge power	32.1 kW	33 kW	44 kW	55 kW
Max. charge / discharge current	70 A*2 ⁽¹⁾			
No. of battery inputs	2			
Max. charge / discharge power of each input	32.1 kW	33 kW	40 kW	40 kW
Communication	CAN/RS485			
Output AC (Grid side)				
Rated output power	29.9 kW	30 kW	40 kW	50 kW
Max. apparent output power	29.9 kVA	30 kVA	40 kVA	50 kVA
Rated grid voltage	3/N/PE, 230 V / 400 V			
Rated grid frequency	50 Hz			
Rated grid output current	43.2 A	43.3 A	57.7 A	72.2 A
Max. output current	43.2 A	43.3 A	57.7 A	72.2 A
Power factor	>0.99 (0.8 leading - 0.8 lagging)			
THDi	< 3%			
Input AC (Grid side)				
Max. AC passthrough current	86.4 A	86.6 A	115.4 A	144.4 A
Rated input voltage	3/N/PE, 230 V / 400 V			
Rated input frequency	50 Hz			
Input Generator				
Max. input power	29.9 kW	30 kW	40 kW	50 kW
Rated input current	43.2 A	43.3 A	57.7 A	72.2 A
Rated input voltage	3/N/PE, 230 V / 400 V			
Rated input frequency	50 Hz			
Output AC (Back-up)				
Rated output power	29.9 kW	30 kW	40 kW	50 kW
Max. apparent output power	1.6 times of rated power, 2 s			
Back-up switch time	< 10 ms			
Rated output voltage	3/N/PE, 230 V / 400 V			
Rated frequency	50 Hz			
Rated output current	43.2 A	43.3 A	57.7 A	72.2 A
THDv (@linear load)	< 2%			
Efficiency				
Max. efficiency	97.8%			
EU efficiency	97.4%			
BAT charged by PV Max. efficiency	98.5%			
BAT charged/discharged to AC Max. efficiency	97.5%			
Protection				
Anti-islanding protection	Yes			
Output over current protection	Yes			
Short circuit protection	Yes			
Integrated DC switch	Optional			
DC reverse-polarity protection	Yes			
Surge protection	DC Type II / AC Type II			
Integrated AFCI (DC arc-fault circuit protection)	Yes ⁽²⁾			
General Data				
Dimensions (W*H*D)	530*880*290 mm			
Weight	73 kg			
Topology	Transformerless			
Self-consumption (night)	<25 W			
Operating ambient temperature range	-25 ~ +60°C			
Relative humidity	0-95%			
Ingress protection	IP66			
Cooling concept	Intelligent redundant fan-cooling			
Max. operation altitude	4000 m			
Grid connection standard	AS/NZS 4777.2:2020			
Safety/EMC standard	IEC 62109-1/-2, IEC 61000-6-2/-4			
Features				
PV connection	MC4 Quick connection plug			
Battery connection	Terminal connector			
AC connection	Terminal Block			
Display	LCD + Bluetooth + APP			
Communication	CAN, RS485, Ethernet, Optional: Wi-Fi, Cellular, LAN			
Country of manufacture	China			

(1) Supporting parallel 140A input. (2) Activation required.

Commercial & Industrial Solar PV Solutions

Solis industrial and commercial string inverter product line is rich, the power range covers 25kW - 125kW, no matter how large your design and requirements are, we can rely on our flexible products to provide you with the best industry green power solutions.

Solis provides the most extensive industrial and commercial string inverter products on the market, and the products are sold well in various countries and regions in the world. They perform well in various harsh and complex environments, and are very stable and reliable.

Solis' C&I products are compatible with modularity and flexibility in program design. From the perspective of inverter performance improvement, we provide an ideal solution for simplifying system planning and design. Including optimizing software algorithms, optimizing hardware port compatibility, etc., to improve system efficiency and reduce system investment costs.



The power range of Solis' C&I products covers a wide range, with a single power up to 125kW. High-efficiency and high-power-density inverters can reduce installation and maintenance workloads and improve overall cost efficiency.

Solis' C&I solutions are supplemented by a series of advanced digital services based on SolisCloud, simplifying the application difficulty of intelligent systems, and providing you with more complete, high-quality and efficient cloud intelligent operation and maintenance solutions.

Models: S5-GC(25-50)K-AU
S5-GC(50-60)K
S5-GC(100-125)K-AU

Output: 25kW - 125kW

Commercial & Industrial Solar PV Solution

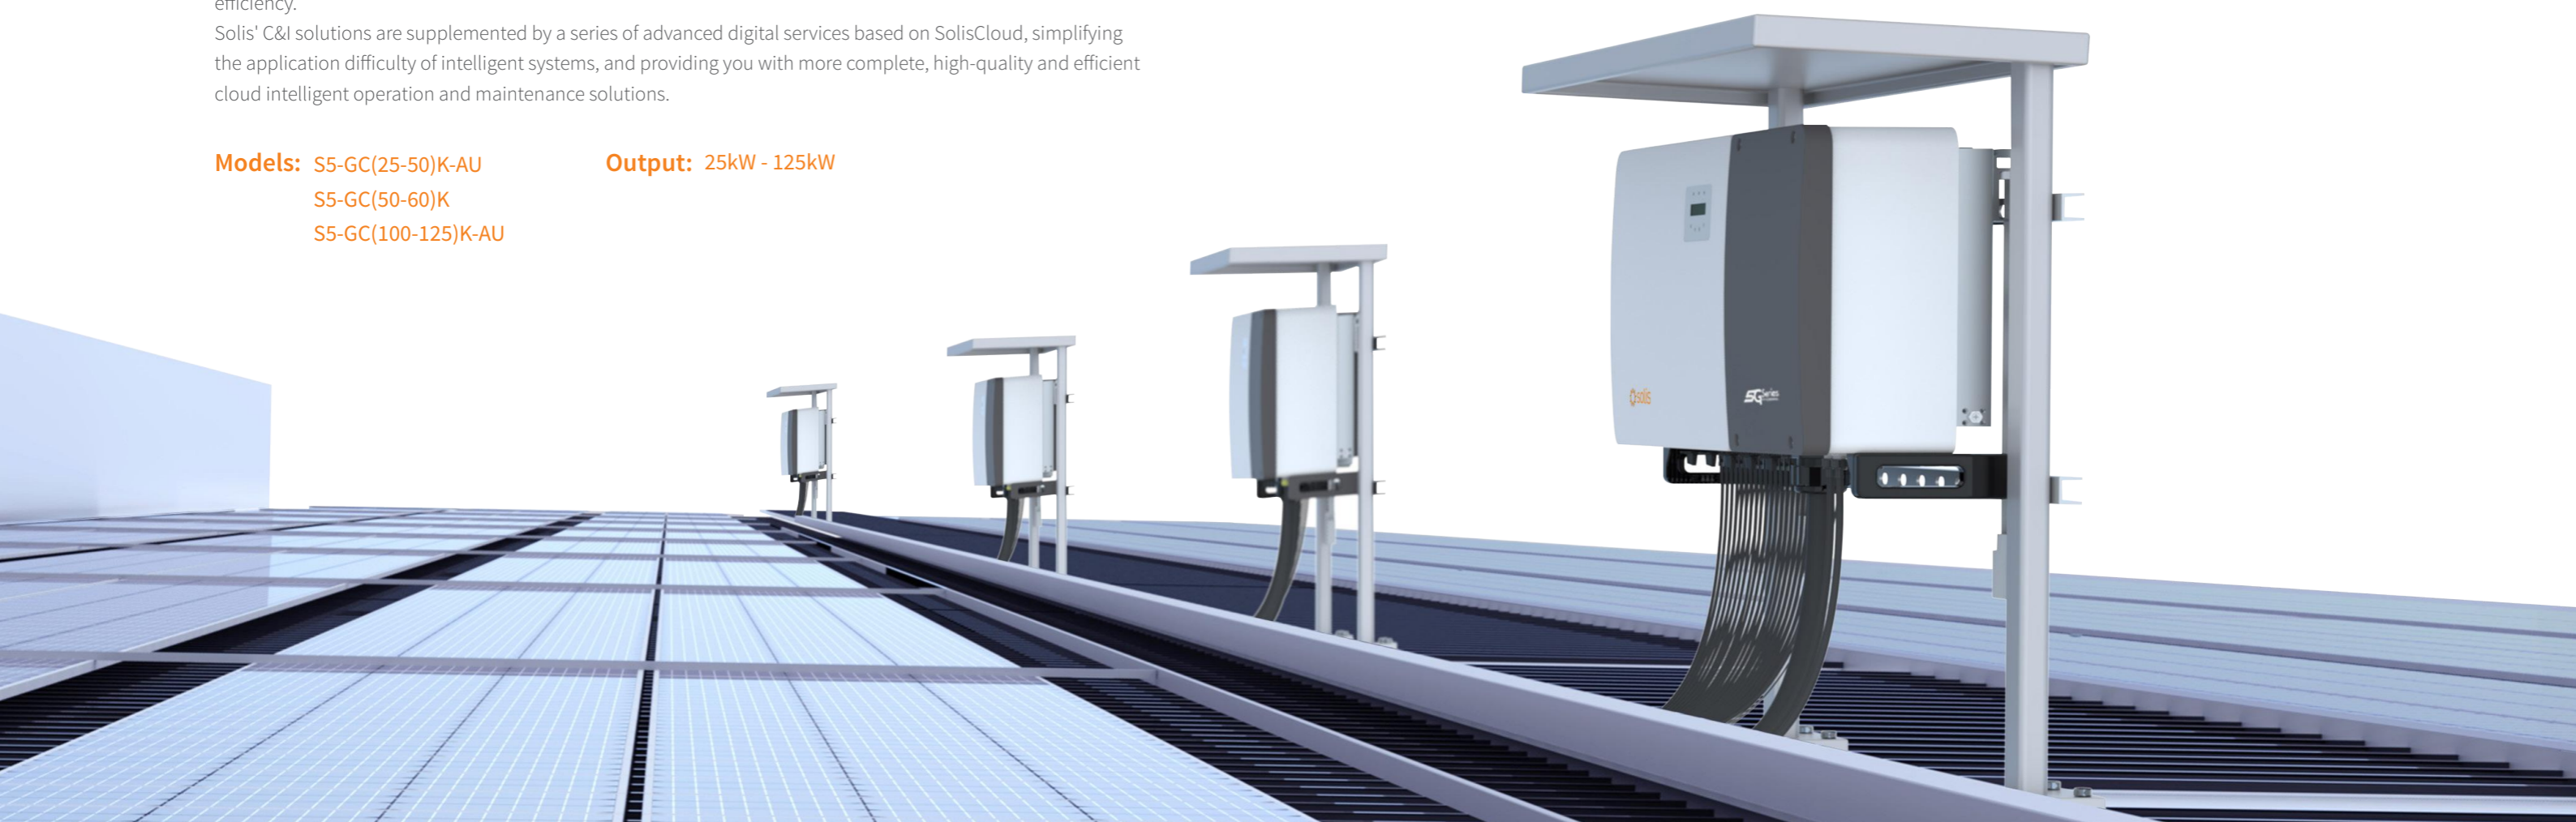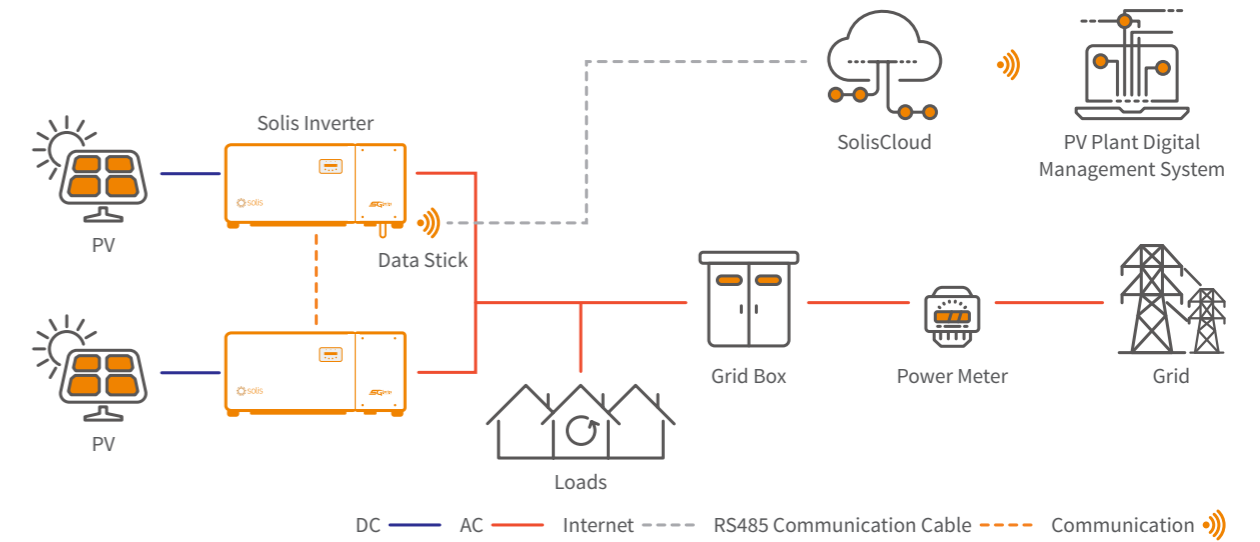

S5-GC(25-50)K-AU

Solis Three Phase Grid-Tied Inverters

Efficient

- Max. efficiency 98.8%
- String current up to 16A
- 4 MPPT design, supports multiple orientation system design
- Night time PID recovery function, increases overall system yield (optional)
- Wide voltage range and low startup voltage

Smart

- Support export power control
- Intelligent string monitoring, smart I-V curve scan
- Support RS485, WiFi, GPRS
- Scan to register on SolisCloud, support remote upgrade and control

Safe

- IP66
- AFCI protection, proactively reduces fire risk
- Globally recognised branded componentry for longer life
- Intelligent redundant fan-cooling

Economic

- Supports GPRS/WiFi communication with less wiring and reduced installation costs
- > 130% DC/AC ratio
- Supports high power modules for lower installation costs

Models:

- S5-GC25K-AU / S5-GC30K-AU
- S5-GC33K-AU / S5-GC36K-AU
- S5-GC40K-AU / S5-GC40K-HV-AU
- S5-GC50K-HV-AU



360° View

• Wi-Fi communication dongle included

DATASHEET

S5-GC(25-50)K-AU

Models	25K	30K	33K	36K	40K	40K-HV	50K-HV
Input DC							
Recommended max. PV power	33.3 kW	39.9 kW	43.9 kW	47.9 kW	53.2 kW	53.2 kW	66.5 kW
Max. input voltage	1100 V						
Rated voltage	600 V						
Start-up voltage	180 V						
MPPT voltage range	200-1000 V						
Max. input current	4*32 A						
Max. short circuit current	4*40 A						
MPPT number/Max. input strings number	4/8						
Output AC							
Rated output power	25 kW	30 kW	33 kW	36 kW	40 kW	40 kW	50 kW
Rated apparent output power	25 kVA	30 kVA	33 kVA	36 kVA	40 kVA	40 kVA	50 kVA
Max. apparent output power	25 kVA	30 kVA	33 kVA	36 kVA	40 kVA	40 kVA	50 kVA
Max. output power	25 kW	30 kW	33 kW	36 kW	40 kW	40 kW	50 kW
Rated grid voltage	3/N/PE, 230 V / 400 V					3/PE, 480 V	
Rated grid frequency	50 Hz						
Rated grid current	41.8 A	50.2 A	55.1 A	60.2 A	66.9 A	53.0 A	66.2 A
Max. output current	41.8 A	50.2 A	55.1 A	60.2 A	66.9 A	53.0 A	66.2 A
Power factor	>0.99 (0.8 leading - 0.8 lagging)						
THDi	<3%						
Efficiency							
Max. efficiency	98.5%		98.6%	98.7%		98.8%	
EU efficiency	98.1%		98.2%	98.3%		98.4%	
Protection							
DC reverse-polarity protection	Yes						
Short circuit protection	Yes						
Output over current protection	Yes						
Surge protection	DC Type II / AC Type II						
Grid monitoring	Yes						
Anti-islanding protection	Yes						
Temperature protection	Yes						
Strings monitoring	Yes						
I/V Curve scanning	Yes						
Integrated AFCI (DC arc-fault circuit protection)	Yes ⁽¹⁾						
Integrated PID recovery	Optional						
Integrated DC switch	Yes (PV2 Switch)						
General Data							
Dimensions (W*H*D)				647*629*252 mm			
Weight	38.2 kg			42.1 kg			
Topology	Transformerless						
Self-consumption (night)	<1 W						
Operating ambient temperature range	-25 ~ +60°C						
Relative humidity	0-100%						
Ingress protection	IP65						
Cooling concept	Intelligent redundant fan-cooling						
Max. operation altitude	4000 m						
Grid connection standard	AS/NZS 4777.2:2020, IEC 62116, IEC 61727, IEC 60068, IEC 61683, EN 50530						
Safety/EMC standard	IEC 62109-1/-2, IEC 61000-6-1/-2/-3/-4						
Features							
DC connection	MC4 connector						
AC connection	OT terminal						
Display	LCD						
Communication	RS485, Optional: Wi-Fi, GPRS						
Country of manufacture	China						

(1) Activation required.

S5-GC(50-60)K

Solis Three Phase Grid-Tied Inverters

Efficient

- Max. efficiency 98.7%
- String current up to 16A
- 5/6 MPPT design, supports multiple orientation system design
- Night time PID recovery function, increases overall system yield (optional)

Smart

- Night SVG function
- Supports export power control
- Intelligent string monitoring, smart I-V curve scan
- Scan to register on SolisCloud, supports remote upgrade and control

Safe

- IP66, C5 Anti-Corrosion Level
- Intelligent redundant fan-cooling
- Globally recognised branded componentry for longer life
- AFCI protection, proactively reduces fire risk

Economic

- Supports GPRS/WiFi communication with less wiring and reduced installation costs
- DC side supports "Y" connector
- 10/12 string inputs allow for 150%+ DC oversizing

Models:

- S5-GC50K
- S5-GC60K



• Wi-Fi communication dongle included

DATASHEET

S5-GC(50-60)K

Models	50K	60K
Input DC		
Recommended max. PV power	66.5 kW	79.8 kW
Max. input voltage	1100 V	
Rated voltage	600 V	
Start-up voltage	195 V	
MPPT voltage range	180-1000 V	
Max. input current	5*32 A	6*32 A
Max. short circuit current	5*40 A	6*40 A
MPPT number/Max. input strings number	5/10	6/12
Output AC		
Rated output power	50 kW	60 kW
Rated apparent output power	50 kVA	60 kVA
Max. apparent output power	50 kVA	60 kVA
Max. output power	50 kW	60 kW
Rated grid voltage	3/N/PE, 230 V / 400 V	
Rated grid frequency	50 Hz	
Rated grid output current	83.6 A	100.3 A
Max. output current	83.6 A	100.3 A
Power factor	>0.99 (0.8 leading - 0.8 lagging)	
THDi	<3%	
Efficiency		
Max. efficiency	98.7%	
CEC efficiency	98.3%	
Protection		
DC reverse-polarity protection	Yes	
Short circuit protection	Yes	
Output over current protection	Yes	
Surge protection	DC Type II / AC Type II	
Grid monitoring	Yes	
Anti-islanding protection	Yes	
Temperature protection	Yes	
Strings monitoring	Yes	
I/V Curve scanning	Yes	
Integrated AFCI(DC ari-fault circuit protection)	Yes ⁽¹⁾	
Integrated PID recovery	Optional ⁽²⁾	
Integrated DC switch	Yes (PV2 Switch)	
General Data		
Dimensions (W*H*D)	691*578*338 mm	
Weight	53.7 kg	
Topology	Transformerless	
Self-consumption (night)	<1 W	
Operating ambient temperature range	-25 ~ +60°C	
Relative humidity	0-100%	
Ingress protection	IP66	
Cooling concept	Intelligent redundant fan-cooling	
Max. operation altitude	4000 m	
Grid connection standard	AS/NZS 4777.2:2020, IEC 62116, IEC 61727, IEC 60068, IEC 61683, EN 50530	
Safety/EMC standard	IEC 62109-1/-2, IEC 61000-6-2/-4	
Features		
DC connection	MC4 connector	
AC connection	OT terminal (max. 70 mm ²)	
Display	LCD, Capacitive touch buttons	
Communication	RS485, USB, Optional: Wi-Fi, GPRS	
Country of manufacture	China	

(1) Activation required. (2) Due to the similar functional logic, when the night time PID-Recovery function is integrated, the night time var compensation function can not be used. Also, the negative grounding option is not available for inverters with night time PID-Recovery function.

S5-GC(100-125)K-AU

Solis Three Phase Grid-Tied Inverters

Efficient

- 10 MPPTs, max. efficiency 99.0%
- > 150% DC/AC ratio
- High power tracking density 100MPPT/MW
- String current up to 16A, perfectly match large current bifacial modules

Smart

- Night SVG function
- Intelligent string monitoring, smart I-V curve scan
- Remote firmware upgrade with simple operation

Safe

- AFCI protection, proactively reduces fire risk
- Built-in PID recovery for better module performance (optional)
- Overvoltage load reduction and leakage current suppression technology, low failure rate
- Globally recognised branded componentry for longer life

Economic

- Power line communication (PLC) (optional)
- DC side supports "Y" connector

Models:

S5-GC100K-AU

S5-GC110K-AU

S5-GC125K-HV-AU



DATASHEET

S5-GC(100-125)K-AU

Models	100K	110K	125K-HV
Input DC			
Max. input voltage	1100 V		
Rated voltage	600 V		720 V
Start-up voltage	195 V		
MPPT voltage range	180-1000 V		
Max. input current	10*32 A		
Max. short circuit current	10*40 A		
MPPT number/Max. input strings number	10/20		
Output AC			
Rated output power	100 kW	110 kW	125 kW
Rated apparent output power	100 kVA	110 kVA	125 kVA
Max. apparent output power	100 kVA	110 kVA	125 kVA
Max. output power	100 kW	110 kW	125 kW
Rated grid voltage	3/N/PE, 230 V / 400 V		3/PE, 480 V
Rated grid frequency	50 Hz		
Rated grid output current	144.3 A	158.8 A	150.4 A
Max. output current	144.3 A	158.8 A	150.4 A
Power factor	>0.99 (0.8 leading - 0.8 lagging)		
THDi	<3%		
Efficiency			
Max. efficiency	98.7%		99.0%
EU efficiency	98.3%		98.6%
Protection			
DC reverse-polarity protection	Yes		
Short circuit protection	Yes		
Output over current protection	Yes		
Surge protection	DC Type II / AC Type II (AC Type I optional)		
Grid monitoring	Yes		
Anti-islanding protection	Yes		
Temperature protection	Yes		
Strings monitoring	Yes		
I/V Curve scanning	Yes		
Integrated AFCI (DC arc-fault circuit protection)	Yes ⁽¹⁾		
Integrated PID recovery	Optional		
Integrated DC switch	Yes		
Integrated AC switch	Optional		
General Data			
Dimensions (W*H*D)	1065*567*344.5 mm		
Weight	91 kg		
Topology	Transformerless		
Self-consumption (night)	<2 W		
Operating ambient temperature range	-30 ~ +60°C		
Relative humidity	0-100%		
Ingress protection	IP66		
Cooling concept	Intelligent redundant fan-cooling		
Max. operation altitude	4000 m		
Grid connection standard	AS/NZS 4777.2, IEC 62116, IEC 61727, IEC 60068, IEC 61683, EN 50530		
Safety/EMC standard	IEC 62109-1/-2, IEC 61000-6-1/-2/-3/-4		
Features			
DC connection	MC4 connector		
AC connection	OT terminal (max. 185 mm ²)		
Display	LCD		
Communication	RS485, Optional: Wi-Fi, GPRS, PLC		
Country of manufacture	China		

(1) Activation required.

C&I Power Plant Case Study



Ninghai Power Plant

- China
- 38MW
- Solis-(215-255)K-EHV-5G

Ninghai Power Plant transitions away from traditional thermal power to integrate solar power generation overcoming technical challenges along the way.

Ninghai Power is dedicated to the innovation of greener power through science and technology and has become a leader in Agrisolar development. As a pioneer in its industry the company has implemented a new energy park project which includes fishery-solar system, Agrisolar and floating solar systems, solar carport and



solar corridor as well as a more traditional solar rooftop. Over 8 different installation types have enabled more green energy to be installed in more areas - true "out of the box" thinking.

The solar plant now generates more than 300 billion kilowatts of green energy.



- India
- 1.12MW
- S5-GC(80-110)K



- Greece
- 100kW
- S5-GC(100-110)K

- UK
- 2MW
- Solis-(100-110)K-5G



- Netherlands
- 168.35kW
- Solis-(80-110)K-5G



- Philippines
- 270kW
- Solis-(25-30)K-LV

Utility Scale Solar PV Solutions



Solis has optimized and innovated around the entire process of utility solar PV solutions. Deeply integrated system design, digital management, and IoT technology effectively optimize the initial investment and future O&M costs of the power station increasing the power generation of the system and the rate of return on investment. Through the concept of "Efficient, safe, reliable, smart O&M, and system-friendly" we maximise the value for customers.

The 1500V high-power system solution can effectively reduce the number of equipment and cable consumption, reduce the initial investment cost, and facilitate installation and maintenance.

Solis utility PV solution has the characteristics of low LCOE. From the perspective of inverter performance improvement, it includes optimizing software algorithms and optimizing hardware port compatibility to improve system efficiency and reduce system investment costs.

Solis utility inverter has a large single power, up to 255kW. The high-efficiency and high-power-density inverter can reduce the workload of installation and maintenance, reduce costs and improve efficiency. Solis utility PV solution is supplemented by a series of advanced digital services and intelligent monitoring equipment based on SolisCloud, simplifying the application difficulty of the intelligent system, and providing a more complete, high-quality and efficient cloud smart O&M solution.


Models:

Solis-(215-255)K-EHV-5G

Output:

215 kW - 255 kW

Utility Scale Solar PV Solution

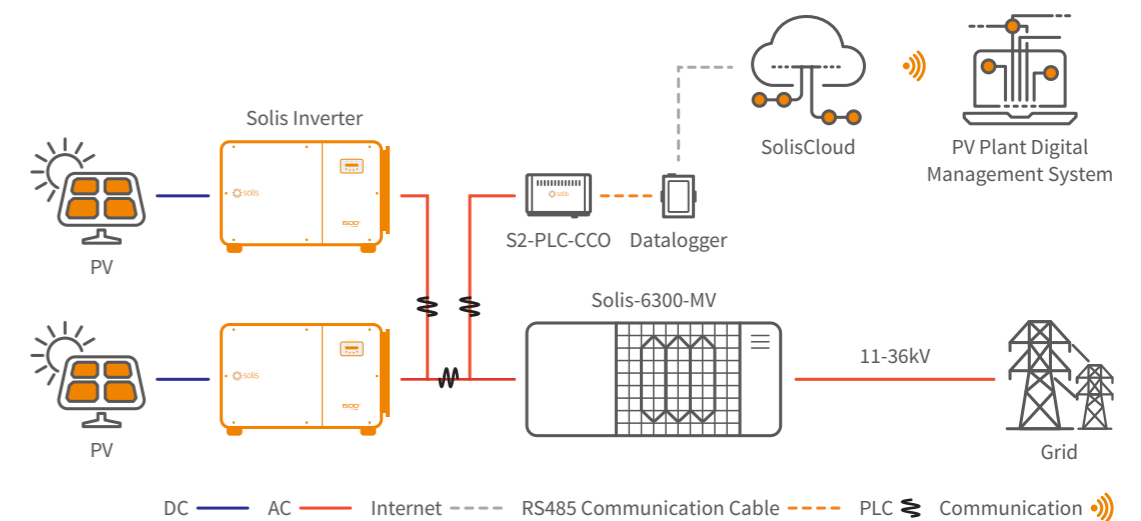

Solis-(215-255)K-EHV-5G

Solis Three Phase Grid-Tied Inverters

Certified by TÜV Rheinland with VDE-AR-N4130, supporting grid connections at Extra High Voltages $\geq 150\text{kV}$ for enhanced grid adaptability.

Efficient

- 9/12/14 MPPTs, max. efficiency 99.0%
- > 150% DC/AC ratio
- High power tracking density 55MPPT/MW
- Compatible with 500W+ bifacial modules

Smart

- Night SVG function
- Intelligent string monitoring, smart I-V curve scan
- Remote firmware upgrade with simple operation

Safe

- IP66
- Built-in PID recovery for better module performance
- Fuse free design, safe and maintenance free
- Globally recognised branded componentry for longer life

Economic

- Power line communication (PLC) (optional)
- DC side supports "Y" connector

Models:

Solis-215K-EHV-5G-PLUS

Solis-255K-EHV-5G

Solis-255K-EHV-5G-PLUS



360° View

DATASHEET

Solis-(215-255)K-EHV-5G

Models	215K-PLUS	255K	255K-PLUS
Input DC			
Max. input voltage	1500 V		
Rated voltage	1080 V		
Start-up voltage	500 V		
MPPT voltage range	480-1500 V		
Max. input current	9*30 A	14*26 A	12*30 A
Max. short circuit current	9*50 A	14*40 A	12*50 A
MPPT number/Max. input strings number	9/18	14/28	12/24
Output AC			
Output power	215 kVA@30°C / 205 kVA @40°C / 195 kVA@50°C	255 kVA@30°C / 235 kVA@40°C / 220 kVA@50°C	
Rated apparent output power	215 kVA	255 kVA	
Rated grid voltage	3/PE, 800 V		
Grid voltage range	640-920 V		
Rated grid frequency	50 Hz		
Max. output current	155.2 A	184.0 A	
Power factor	>0.99 (0.8 leading - 0.8 lagging)		
THDi	<3%		
Efficiency			
Max. efficiency	99.0%		
EU efficiency	98.8%	98.7%	98.8%
Protection			
DC reverse-polarity protection	Yes		
Short circuit protection	Yes		
Output over current protection	Yes		
Surge protection	DC Type II / AC Type II		
Grid monitoring	Yes		
Anti-islanding protection	Yes		
Temperature protection	Yes		
Strings monitoring	Yes		
I/V Curve scanning	Yes		
Night time SVG function	Yes		
Integrated PID recovery	Yes		
Integrated DC switch	Yes		
General Data			
Dimensions (W*H*D)	1125*770*384 mm		
Weight	109 kg	113 kg	
Topology	Transformerless		
Self-consumption (night)	<2 W		
Operating ambient temperature range	-30 ~ +60°C		
Relative humidity	0-100%		
Ingress protection	IP66		
Cooling concept	Intelligent redundant fan-cooling		
Max. operation altitude	4000 m		
Grid connection standard	AS/NZS 4777.2:2020, IEC 62116, IEC 61727, IEC 60068, IEC 61683, EN 50530		
Safety/EMC standard	IEC/EN 62109-1/-2, IEC/EN 61000-6-2/-4		
Features			
DC connection	MC4 connector		
AC connection	OT terminal (max. 300 mm ²)		
Display	LCD		
Communication	RS485, Optional: PLC		
Country of manufacture	China		

Utility-scale Plant Case Study



📍 Mexico
⚡ 20MW 📦 Solis-20K-HV



📍 Poland
⚡ 10MW 📦 Solis-125K-EHV-5G



📍 China
⚡ 1GW 📦 Solis-(215-255)K-EHV-5G



📍 India
⚡ 2MW 📦 Solis-(100-110)K



📍 China
⚡ 300MW 📦 Solis-(215-255)K-EHV-5G

Tidal-Flat 300MW Utility Scale Solar PV Plant

After the project is put into operation, the generating capacity is estimated to be 400,000,000 kWh/ year and delivers a reduction of 350, 000 tons of CO₂, 12,000 tons of SO₂, and 110,000 tons of Carbon dust. Solis commercial scale string inverters boast an abundance of technological features which can adapt to a variety of environments. We look forward to seeing more applications utilizing Solis inverters. We are committed to our mission - Developing Technology to Power the World with Clean Energy.


Export Power Management Solutions



In some countries, local regulations limit the amount of PV power that can be exported to the grid or allow no export. Solis offers two export limitation solutions for single and multiple inverters system.


Export Power Management Solutions - Single-inverter System

In a single-inverter system, the export limitation is integrated into the inverter firmware. Use a meter or a CT to measure the output of the system, then to adjust PV power production.

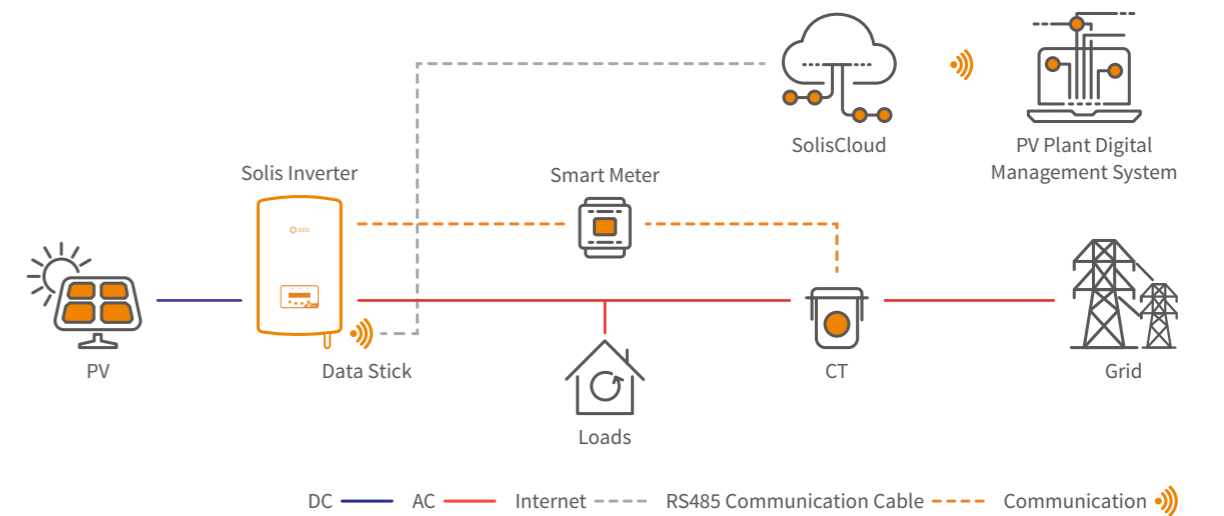

Export Power Management Solution - Multi-inverter System

In a multi-inverter system, the export limitation is integrated into the EPM (Export Power Manager) firmware. The EPM will monitor and control the backflow power from the inverter to the grid thus providing export power control of inverters.

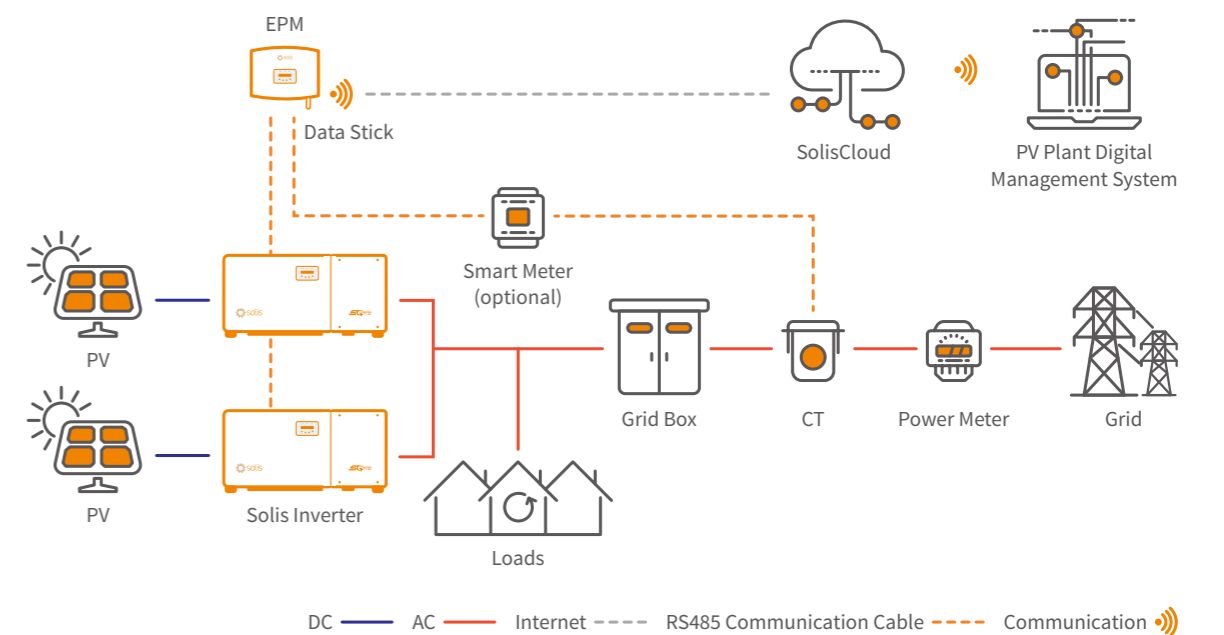

Solis-EPM-5G

Solis Export Power Manager

Smart & strong

- Simultaneous control of 20 X Solis inverters
- Realizing reactive compensation of the system

Saving & high precision

- Simultaneously monitor the operating data of the 20 X Solis inverter, saving the cost of the monitoring system
- The control accuracy is up to 1%, which improves the system's spontaneous use rate

Friendly & compatible

- Supports simultaneous access of Solis inverters with different powers
- Monitor power generation and load consumption at all times

Models:

Solis-EPM1-5G

Solis-EPM3-5G-PLUS

Solis-EPM3-5G-PRO



DATASHEET

Solis-EPM-5G

Models	Solis-EPM1-5G	Solis-EPM3-5G-PLUS	Solis-EPM3-5G-PRO				
Input AC							
Rated voltage	1/N/PE, 230 V	3/(N)/PE, 400 V; 3/PE, 480 V	1/N/PE, 230 V; 3/(N)/PE, 400 V; 3/PE, 480 V				
Input voltage range	100 ~ 300 V (L-N)	175~ 494 V (L-L)	100 ~ 300 V (L-N); 175 ~ 494 V (L-L)				
Input frequency range	45~65 Hz						
Communication							
Inverter communication	Modbus						
Communication with inverter	RS485 (Wired)						
Max. communication inverter numbers	20	20 (Recommended)	20 (Recommended)				
Monitoring	WiFi/4G/LAN Stick (Optional)	WiFi/LAN (Integrated)	WiFi/4G/LAN Stick (Optional)				
General Data							
Operating ambient temperature range	-25 ~ +60°C						
Relative humidity	5%~95%						
Max. operation altitude	2000 m						
Ingress protection	IP65						
Pollution degree	PD2 (Inside), PD3 (Outside)						
Overvoltage category	III						
Self-consumption	<6 W	<15 W	<6 W				
Dimensions (W*H*D)	364*276*114 mm	488*446*149 mm	364*276*114 mm				
Weight	2.1 kg (without CT, Meter)	5.4 kg (without CT)	2.1 kg (without CT, Meter)				
AC connection	Quick connection terminal						
Display	LCD						
Smart meter	No	Three phase: DTSD1352-C (Integrated)	Split phase: AGF-AE-D Three phase: ADL3000-E-B				
CT connection	Plug terminal						
CT specification	Single phase: Standard (100/5 A or 300/5 A)	Three phase: Optional (Secondary current is 5 A)	Split phase: Standard (200/5 A) Three phase: Optional (Secondary current is 5 A)				
Power control accuracy	1%Pn						
Features							
Failsafe function	Yes						
Remote upgrade	Yes						
Control time	5 s						
CT specification							
	Specification	Dimensions (mm)			Hole size (mm)		Ratio
		W	H	D	a	e	
	CT-30×20-100 A	90	114	40	22	32	100:5 A
	CT-60×40-300 A	114	140	36	42	62	300:5 A
	CT-80×40-600 A	122	162	40	42	82	600:5 A
	CT-80×40-1000 A	122	162	40	42	82	1000:5 A
	CT-160×80-2000 A	184	254	52	82	162	2000:5 A
CT-160×80-3000 A	184	254	52	82	162	3000:5 A	

SolisCloud: Intelligent Solar Energy System Monitoring

The SolisCloud intelligent monitoring system includes hardware and software products and is a comprehensive energy management solution. Hardware products, including data stick, data box, EPM and PLC, etc; transmit to SolisCloud online energy management platform. Real-time monitoring, visualized management and remote O & M of residential, C&I and utility scale solar PV plants.



S2-WL-ST



S2-WL-ST (4 Pin) S2-WL-ST (USB)

S3-WiFi-ST



S3-WiFi-ST

S1-W4G-ST



S1-W4G-ST (4 Pin) S1-W4G-ST (USB)

Solis-Link: RF



RF-Stick RF Gateway

S2-PLC-CCO



S2-PLC-CCO

SolisCloud


New generation Solis PV monitoring platform

SolisCloud is the new generation of intelligent PV system monitoring. This new monitoring platform will empower you like never before. You will have full control of your system whenever and wherever you are. You will benefit from upgraded accurate fault alarm messaging that is adjustable to notify you within hours that fit meet your needs.

For simple O&M the new platform features a full size display of all your installations with real-time data. You will have an intelligent alarm system that gives recommendations to quickly repair your field faults. In depth analysis tools allow you to understand the overall health of your system. IV curve scanning can be done easily and quickly on your whole system. A live power flow display gives visibility of both standard solar systems as well as storage systems. Most importantly you will have complete control of your systems and be able to monitor and adapt anything when and how you want.



Intelligent Monitoring Solution - SolisCloud

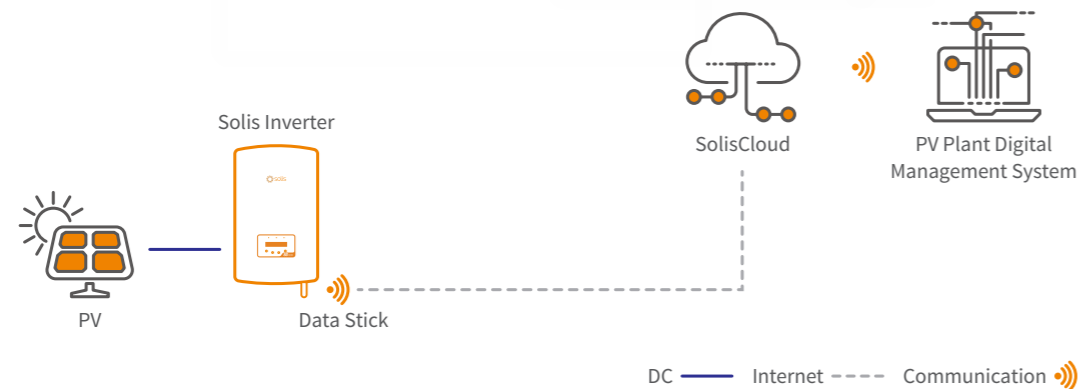

Advanced Cloud Platform

- Connecting with multiple types of devices seamlessly: Inverters, export power managers, weather stations, etc.

Efficient O & M

- Smart I-V curve scan, system health report, string-level fault finding

Multiple Plant Management

- Manage multiple types of systems across residential, commercial and utility scale plants. Enables multiple team management across different sectors

Multiple Plant Management


- Clear and concise display of system performance and benefits including carbon emissions saved and equivalent trees planted as well as showing system yield & earnings

Download the App



Accessories available:

- S2-WL-ST Solis-Link: RF
- S3-WiFi-ST S2-PLC-CCO
- S1-W4G-ST



The Full Series of Operation Videos Will be available on **Youtube**

S2-WL-ST

Solis Data Loggers

Use RS485 communication method to connect the inverters, up to 10 inverters can be connected at the same time. Data communication with the monitoring system through wireless WiFi network or LAN, which can realize remote control and monitoring. The network transmits intuitive data, which is convenient for customers to monitor anytime and anywhere.

Features:

- Support WiFi and LAN communication
- Status indicator, easy to display working status
- RESET button, one key to send data, convenient debugging
- Plug and play, quick installation
- Fault alarm, real-time monitoring
- Support Bluetooth nearby connection and debugging
- One-key assignment of inverter address, efficient and labor-saving




S2-WL-ST (4 Pin)



S2-WL-ST (USB)

Intelligent Monitoring Solution - S2-WL-ST

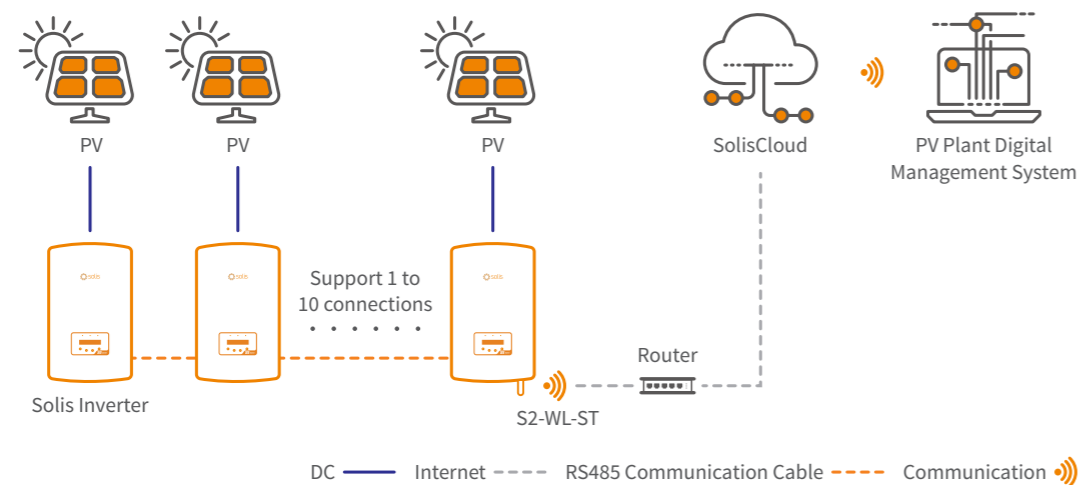

DATASHEET

S2-WL-ST

Models	S2-WL-ST (4 Pin)	S2-WL-ST (USB)
Communication		
Supported device type	Solis inverter	
Number of connected inverters ⁽¹⁾	≤10	
Data collection intervals	5 minutes	
Status indicator	3 LED Indicator Lights	
Communication interface	External 4-Pin Port	External USB Port
Ethernet communication	Number of routes × 1, 10 / 100Mbps adaptive, communication distance ≤ 100m	
Wireless communication	802.11b/g/n (2.4G) ⁽²⁾	
Near end communication	BLE4.2	
Configuration method	APP/WEB	
Electrical		
Operating voltage	DC 5 V (+/-5%)	
Operating power consumption	≤2 W	
Environment		
Operating ambient temperature range	-30 ~ +65°C	
Operating humidity	5%-95%, relative humidity, non-condensing	
Storage temperature	-40 ~ +70°C	
Storage humidity	< 40%	
Max. operation altitude	4000 m	
Protection degree	IP65	
Mechanical		
Dimensions (L*W*H)	145*50*41 mm	130*50*41 mm
Installation method	Externally Insert + Twist Lock	Externally Insert + Tab Lock
Weight	100 g	90 g
Others		
Certification	CE, FCC	

(1) Inverters must first be hand-in-hand connected by RS485. (2) 5 GHz Wi-Fi networks are not supported.

S3-WiFi-ST

Solis Data Loggers

Use RS485 communication method to connect the inverter, and data connection through wireless WiFi network, which can realize remote control and monitoring. The network transmits intuitive data, which is convenient for customers to monitor at any time and place.


Features:

- Fault alarm, real-time monitoring
- Status indicator, easy to display working status
- Plug and play, convenient and fast
- RESET button, one key to send data, convenient debugging



S3-WiFi-ST

Intelligent Monitoring Solution - S3-WiFi-ST

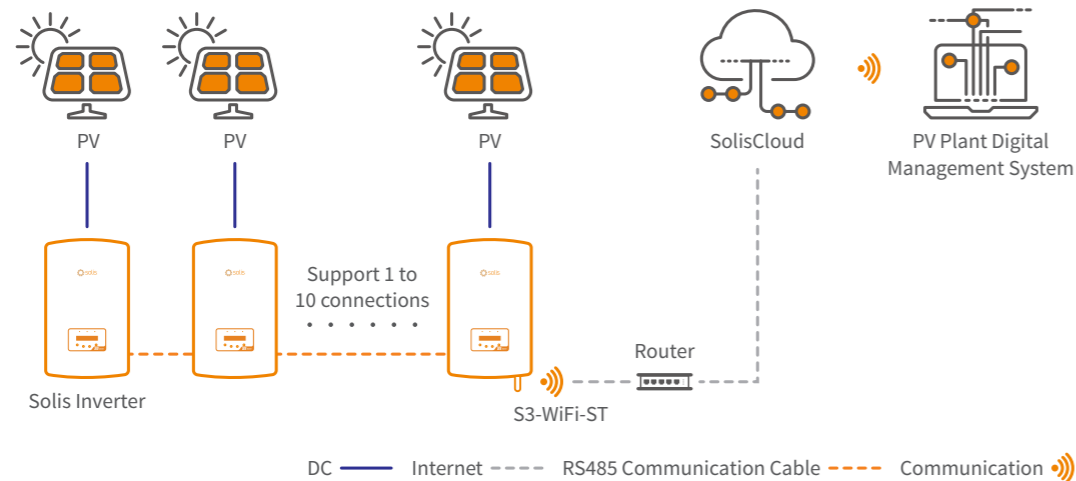

DATASHEET

S3-WiFi-ST

Models	S3-WiFi-ST
Communication	
Supported device type	Solis inverter
Number of connected inverters ⁽¹⁾	≤10
Data collection intervals	5 minutes
Status indicator	3 LED Indicator Lights
Communication interface	External 4-Pin Port
Wireless communication	802.11b/g/n (2.4G) ⁽²⁾
Configuration method	APP/WEB
Electrical	
Operating voltage	DC 5V(+/-5%)
Operating power consumption	≤2 W
Environment	
Operating ambient temperature range	-30 ~ +65°C
Operating humidity	5%-95%, relative humidity, non-condensing
Storage temperature	-40 ~ +70°C
Storage humidity	< 40%
Max. operation altitude	4000 m
Protection degree	IP65
Mechanical	
Dimensions (L*W*H)	133*44*44 mm
Installation method	Externally Insert + Twist Lock
Weight	85 g
Others	
Certification	CE, FCC

(1) Inverters must first be hand-in-hand connected by RS485.

(2) 5 GHz Wi-Fi networks are not supported.

S1-W4G-ST

Solis Data Loggers

Use RS485 communication method to connect the inverters, up to 10 inverters can be connected at the same time. Data communication with the monitoring system through wireless WiFi network or 4G, which can realize remote control and monitoring. The network transmits intuitive data, which is convenient for customers to monitor anytime and anywhere.

Features:

- Support WiFi and 4G communication
- Status indicator, easy to display working status
- RESET button, one key to send data, convenient debugging
- Fault alarm, real-time monitoring
- Support Bluetooth nearby connection and debugging
- One-key assignment of inverter address, efficient and labor-saving




S1-W4G-ST (4 Pin)



S1-W4G-ST (USB)

Intelligent Monitoring Solution - S1-W4G-ST

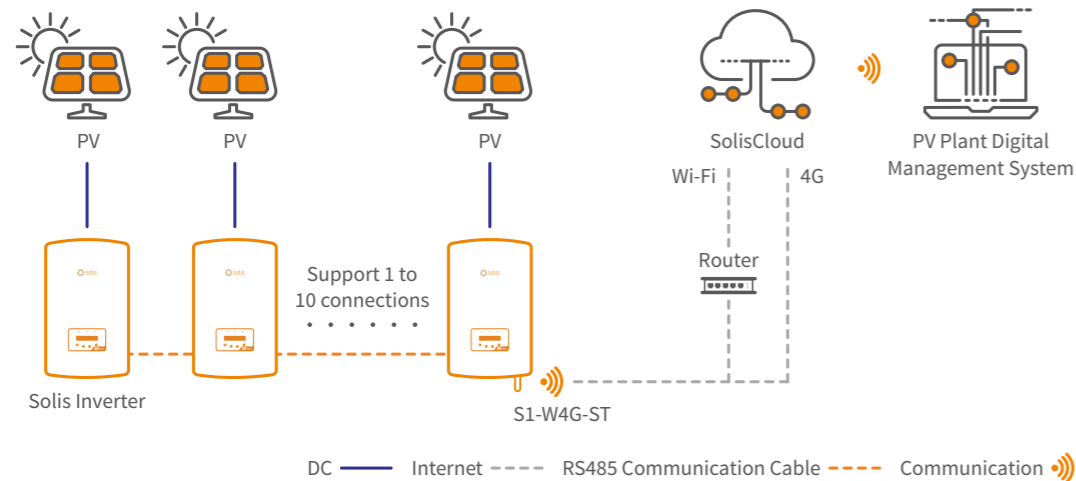

DATASHEET

S1-W4G-ST

Models	S1-W4G-ST (4 Pin)	S1-W4G-ST (USB)
Communication		
Supported device type	Solis inverter	
Number of connected inverters ⁽¹⁾	≤10	
Data collection intervals	5 minutes	
Status indicator	3 LED Indicator Lights	
Communication interface	External 4-Pin Port	External USB Port
Wireless communication	WiFi: 802.11b/g/n (2.4G) ⁽²⁾ GSM/GPRS: 850/900/1800/1900 MHz	
Near end communication	BLE4.2	
Configuration method	APP/WEB	
Electrical		
Operating voltage	DC 5 V (+/-5%)	
Operating power consumption	≤5 W	
Environment		
Operating ambient temperature range	-30 ~ +65°C	
Operating humidity	5%-95%, relative humidity, non-condensing	
Storage temperature	-40 ~ +70°C	
Storage humidity	< 40%	
Max. operation altitude	4000 m	
Protection degree	IP65	
Mechanical		
Dimensions (L*W*H)	128*50*34 mm	113*50*34 mm
Installation method	Externally Insert + Twist Lock	Externally Insert + Tab Lock
Weight	80 g	65 g
Others		
Certification	CE, FCC	

(1) Inverters must first be hand-in-hand connected by RS485.

(2) 5 GHz Wi-Fi networks are not supported.

Solis-Link: RF

Solis Data Loggers

Solis box type (gateway) + stick type (terminal) monitoring data collector, the terminal uses RS485 communication to connect to the inverter, the gateway uses wired Ethernet to connect to the home router, and the gateway and terminal are connected through RF data to realize automatic networking. The equipment is connected to the gateway automatically, free of wiring and wireless network configuration; it aims to realize a stable and intelligent operation and maintenance management plan for users.

Features:

- Plug and play, easy to operate
- No Wi-Fi configuration required, RF intelligent connection
- Stable network connection, real-time data transmission
- Remote monitoring, allowing real-time monitoring of mobile APP and Web




RF-Stick



RF Gateway

Intelligent Monitoring Solution - Link: RF

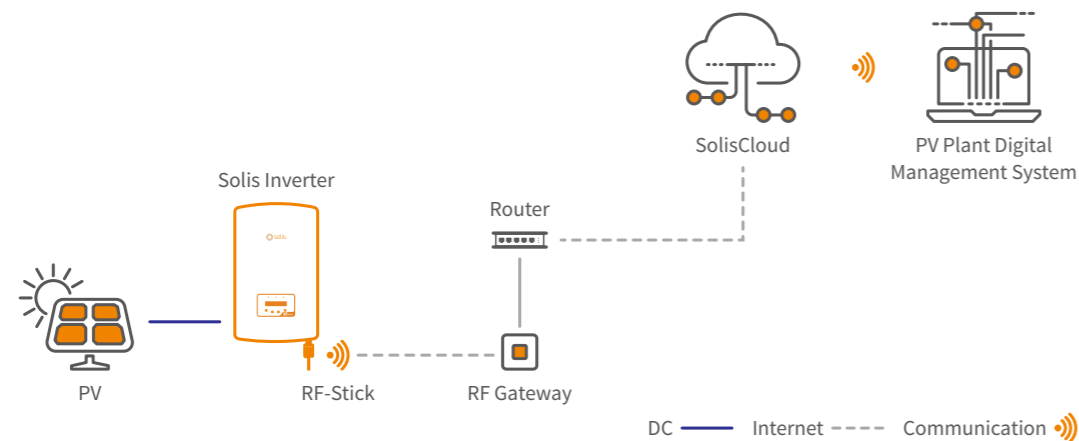

DATASHEET

Solis-Link: RF

Models	RF-Stick	RF-Gateway
Wireless parameters		
Demodulation		FSK
Data rate		9.6 kbps
Transmitting power		+20 dBm
Transmitting frequency offset		20 kHz
Transmission channel bandwidth		<8 kHz
Receiving channel bandwidth		200 kHz
Hardware parameters		
Data interface	RS 485	Adaptive 10 / 100 Mbps
Operating voltage	DC 5 V ~ DC 12 V	DC 5.0 V (+/-5%)
Max. working voltage	15 V	12 V
Operating power consumption	1.5 W	
Indicator light	System running Status--RUN Light Inverter Connection Status--COM Light RF Connection Status--RF Light	System running Status--RUN Server Connection Status--SER RF Connection Status--RF
Operating humidity	10%-90%, relative humidity, non-condensing	
Storage temperature	-45 ~ +90°C	
Storage humidity	< 40%	
Software parameters		
Number of connected inverters	1	/
Serial communication rate	9600 bps (adjustable:1200-57600 bps)	/
Data collection intervals	5 minutes	/
Link requirement	/	CAT5 shielded network cable length <50 m
Mechanical		
Dimensions (L*W*H)	47*41*160 mm	90*23*90 mm
Weight	130 g	80 g
Protection degree	IP 65	IP 21
Others		
Certification	CE	

S2-PLC-CCO

Solis PLC Central Controller

S2-PLC-CCO (CCO: Central Controller) is applied in PV systems to achieve power line communication. Power Line Communication is transmission of data over the AC Wires of the system.


Features:

- No need to lay communication cables, reducing construction costs and maintenance costs
- Strong anti-interference ability
- Support multi-terminal networking
- Stable network connection, real-time data transmission



S2-PLC-CCO

Intelligent Monitoring Solution - S2-PLC-CCO

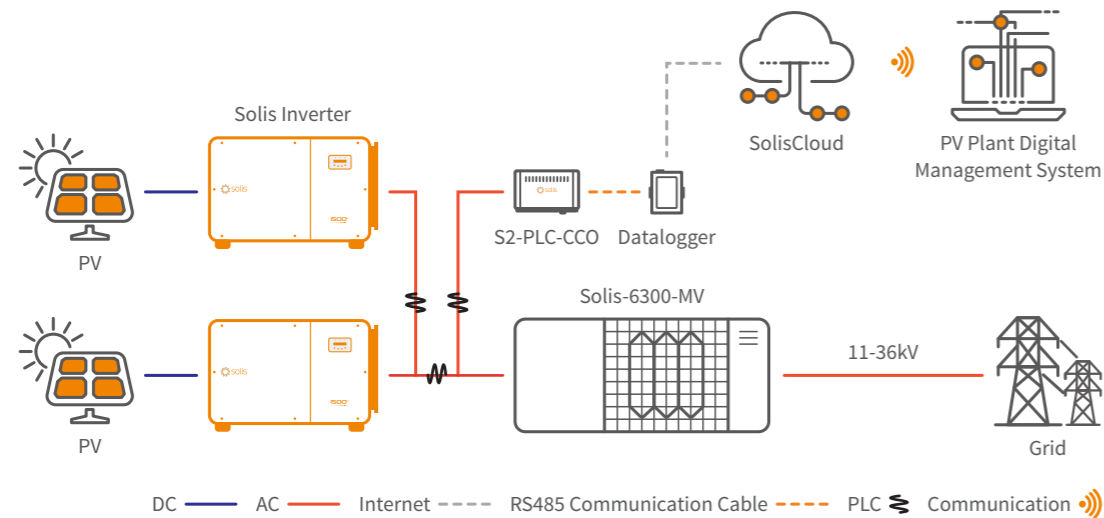

DATASHEET

S2-PLC-CCO

Models	S2-PLC-CCO
Communication	
Supported device type	Solis inverter
Number of connected inverters	≤80
Status indicator	4 LED Indicator Lights
Frequency band	2MHz-12MHz
Communication interface	4pin/RJ45/RS485
Debugging interface	Bluetooth
Baud rate	9600/19200/57600/115200
Electrical	
Input voltage (Power adapter)	12Vdc
Input current (Power adapter)	2Amax
AC port input line voltage	50-920 V, 50 Hz
Operating power consumption	<5 W
Environment	
Operating ambient temperature range	-40 ~ +70°C
Operating humidity	5%-95% relative humidity, non-condensing
Storage temperature	-45~+90°C
Storage humidity	5%-95% relative humidity, non-condensing
Max. operation altitude	4000 m
Protection degree	IP 20
Mechanical	
Dimensions (L*W*H)	255*165*45 mm
Installation method	Hanging ear mounting, rail mounting
Weight	750 g

Contact Us

HQ

- +86 574 6580 2188
- sales@ginlong.com service@ginlong.com
- 188 Jinkai Road, Binhai Industrial Park, Xiangshan, Ningbo, Zhejiang, 315712, China

UK

- +44 113 328 0870 (sales) +44 1514 536515 (service)
- europesales@solisinverters.com euservice@solisinverters.com
- 1 Church Street Bootle Liverpool, L20 1AF, UK

Mexico

- +86 574 6580 2188 (sales) +52 81 3434 2092 (service, WhatsApp only)
- sales@ginlong.com service.latam@solisinverters.com
- Monterrey, Mexico

South Africa

- +27 010 222 0181
- sales@ginlong.com saservice@solisinverters.com
- 1487 Seilskip Road, Laser Park, Honeydew, Roodepoort, Gauteng, South Africa

Poland

- +44 113 328 0870 (sales) +48 221 031 937 (service)
- europesales@solisinverters.com plservice@solisinverters.com
- Warsaw, Poland

Spain (EU Service Center)

- +34 914 430 810 (sales) +34 919 495 286 (service Spain)
- europesales@solisinverters.com (sales)
spservice@solisinverters.com (service Spain)
euservice@solisinverters.com (service EU)
- Calle de Serrano, 240 - 1ª planta 28016 Madrid, Spain

Korea

- +82 32 822 2188 (sales) +82 10 7924 2198 (service)
- krsales@solisinverters.com (sales & service)
- #A-615, Smart Valley, 30 Songdomirae-ro, yeonsu-gu, Incheon, Korea

Malaysia

- +86 574 6580 2188 (sales) +60 0162323512 (service)
- sales@ginlong.com service@ginlong.com
- Jalan Kelang Lama, 58200 Kuala Lumpur, Malaysia

Australia

- +61 3 8555 9516
- sales@solisinverters.com.au service@solisinverters.com.au
- No. 5 / 109 Tulip Street, Cheltenham, Vic. 3192 Australia

Vietnam

- +84 98 316 8126 (sales) +84 24 7109 7614 (service)
- sales@ginlong.com service@ginlong.com
- 38/21 Đ. Lố Ổ, Xã Bình Thắng, Dĩ An, Bình Dương, Việt Nam

India

- +91 224 9744 251 (sales) +91 224 9744 021 (service)
- indiasales@ginlong.com inservice@solisinverters.com
- 104, wing -A, 1st floor, Techno1 City Premises Plot no. X-4/1 Mahape Navi Mumbai- 400710, India

USA/ Canada

- +1 866 438 8408
- ussales@solisinverters.com usservice@solisinverters.com
- 12333 Sowden Rd Ste B #30327, Houston TX 77080 USA

Benelux (Belgium, Netherlands, Luxembourg)

- +31 85 048 1300
- benelux@solisinverters.com (sales & service)
beservice@solisinverters.com (service Belgium)
nlservice@solisinverters.com (service Netherlands)
- Nokweg 3-B, 2451 AL Leimuïden, Nederland

Chile

- +86 574 6580 2188 (sales)
+52 811 500 2841 (service) +52 33 1751 0488 (service)
- sales@ginlong.com service@ginlong.com

Thailand

- +86 574 6580 2188 (sales) +66 099 050 5595 (service)
- sales@ginlong.com service@ginlong.com
- Vibhavadi Rangsit Road, Chatucha, Bangkok 10900, Thailand

Brazil

- +55 19 996133803 (sales) +55 19 999618000 (service, WhatsApp)
- sales@ginlong.com service@ginlong.com
- Rua James Clerk Maxwell, nº 280, Unidade 07, Empresa Solis, Bairro Parque Tecnológico Techno Park, Condomínio Empresarial Aztech, Campinas, SP, CEP 13.069-380

Myanmar

- +86 574 6580 2188 (sales) +95 94 302 3335 (service)
- sales@ginlong.com service@ginlong.com
- No (10) Sagwar Pin Street, Kyimyindaing, Yangon City

Sweden

- +46 725 344 987 (sales) +46 850 282 408 (service)
- europesales@solisinverters.com seservice@solisinverters.com
- Åkersberga, Sweden

Romania

- +40 373 808 894 (service)
- europesales@solisinverters.com euservice@solisinverters.com
- Brasov, Romania

Pakistan

- +86 574 6580 2188 (sales) +92 42 3546 7247 (service)
- sales@ginlong.com service@ginlong.com
- Plot # 07, Opposite Usman Carpet, Defence Road, Lahore

Ireland

- +353 1592 0312 (service)
- europesales@solisinverters.com euservice@solisinverters.com
- Dublin, Ireland

Austria

- +43 800 070 634(service)
- europesales@solisinverters.com deservice@solisinverters.com
- Vienna, Austria

Greece

- +30 8000000227 (service)
- europesales@solisinverters.com grservice@solisinverters.com
- Athens, Greece

Lithuania

- +370 609 99959 (service)
- europesales@solisinverters.com ltservice@solisinverters.com

Singapore

- +86 574 6580 2188 (sales) +60 016 232 3512 (service)
- sales@ginlong.com service@ginlong.com

Philippines

- +86 574 6580 2188 (sales) +63 2 8372 7945 (service)
- sales@ginlong.com phservice@solisinverters.com
- 40 Nadurata St. Zone 5 Brgy. 53 Grace Park West , Caloocan City, Metro Manila, Philippines

Germany

- +49 800 5369147 (service)
- europesales@solisinverters.com deservice@solisinverters.com
- Bad Pyrmont, Germany

Turkey

- +90 545 651 3541
- europesales@solisinverters.com euservice@solisinverters.com
- Istanbul, Turkey

Indonesia

- +86 574 6580 2188 (sales) +62 081385918539 (service)
- sales@ginlong.com service@ginlong.com
- Kunciran Pinang, Tangerang, Indonesia

France

- +34 914 430 810 (sales) +33 971 078 736 (service)
- europesales@solisinverters.com euservice@solisinverters.com
- Paris, France

Portugal

- +351 80 050 6138 (service)
- europesales@solisinverters.com poservice@solisinverters.com
- Lisbon, Portugal

Sri Lanka

- +86 574 6580 2188
- sales@ginlong.com service@ginlong.com
- Colombo, Sri Lanka

Switzerland

- +41 800 563 032 (service)
- europesales@solisinverters.com deservice@solisinverters.com
- Zurich, Switzerland

Italy

- +39 02 8295 7352
- europesales@solisinverters.com itservice@solisinverters.com

