


SolisCloud Monitoring Setup for customer- Using Web Browser

Step 1: Main Page

- Open the link - www.soliscloud.com

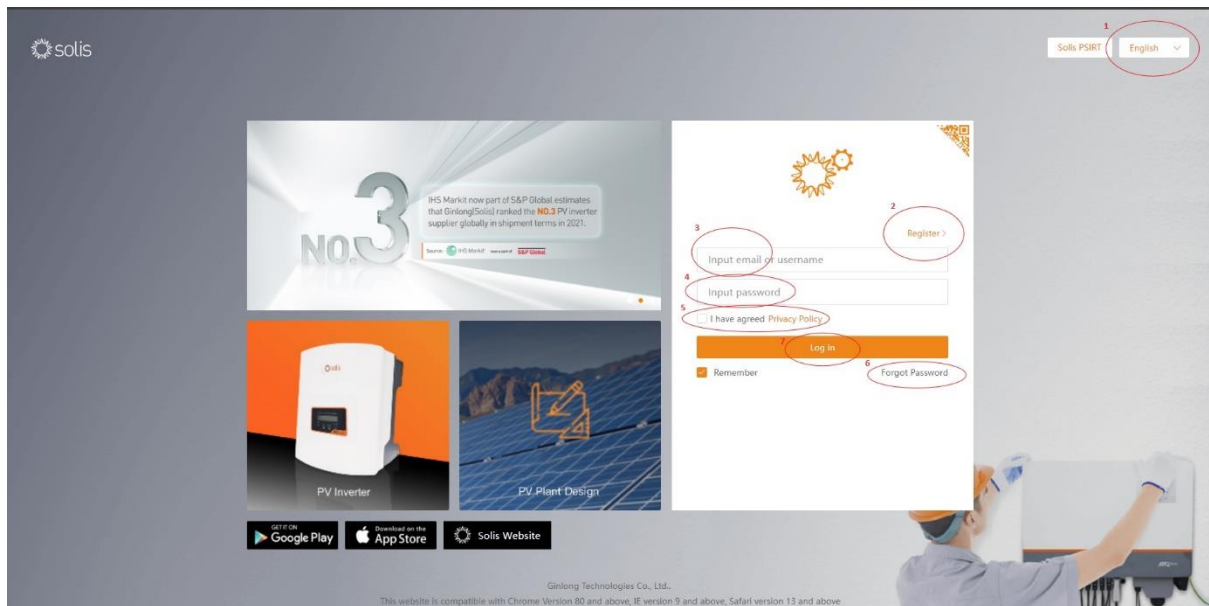


Example of SolisCloud page can be seen above.

Main page allows you to select language¹, register², login⁷ and use <forgot password>⁶ to change your password.

- Press “Register” for new users.


Step 2: Installer or Customer

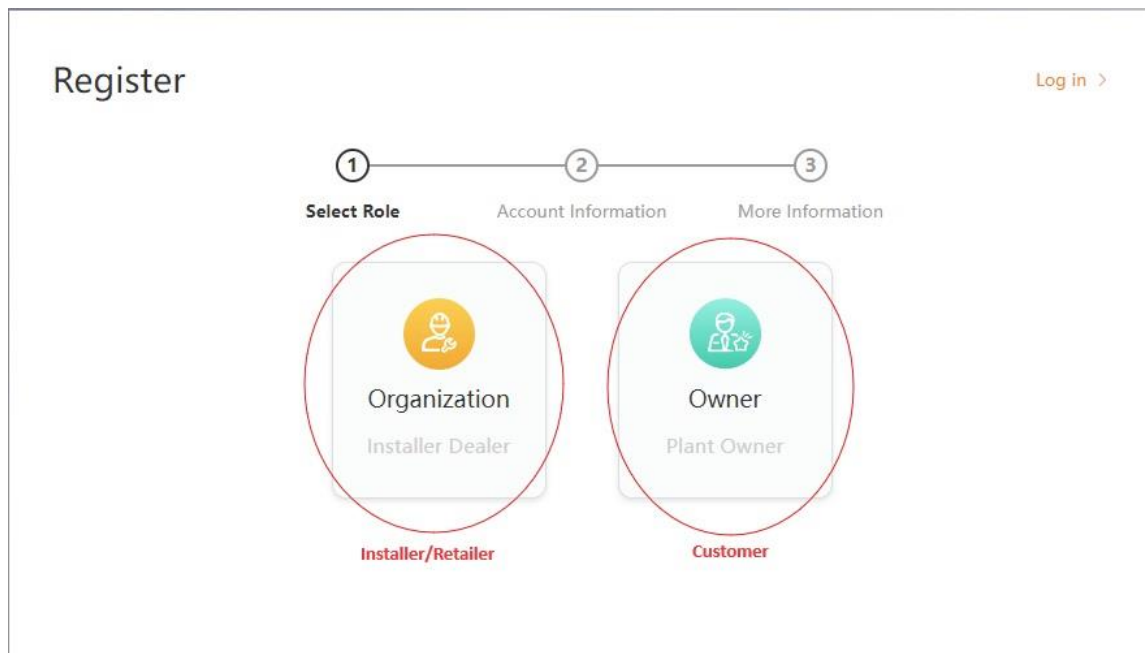

- Click **Owner** for customers.
- Click **Organization** for installers.

Step 3: Registration

- Enter your email address.

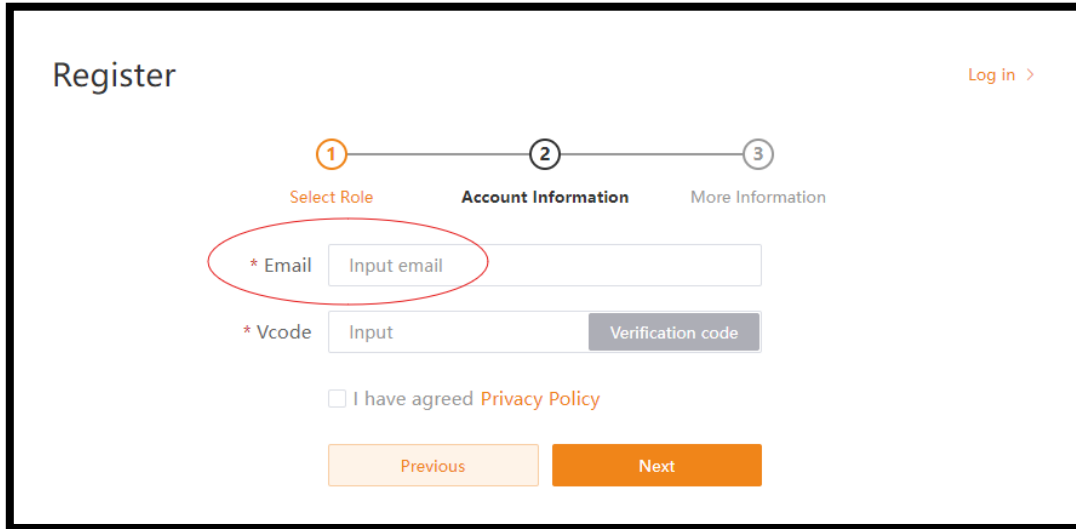

Register Log in >


1 Select Role 2 Account Information 3 More Information

* Email

* Vcode

I have agreed [Privacy Policy](#)

- Then Press on – **Verification code**


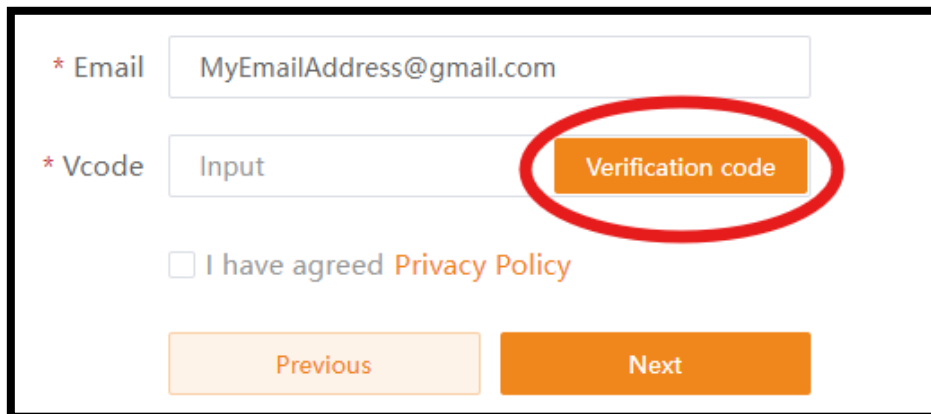


* Email

* Vcode

I have agreed [Privacy Policy](#)


- Click and Drag arrow to move puzzle piece to complete the image as below:

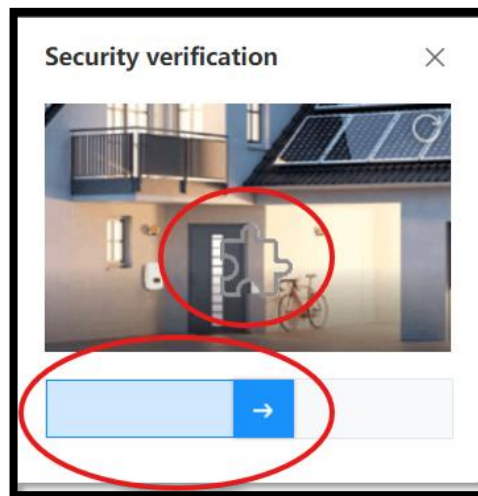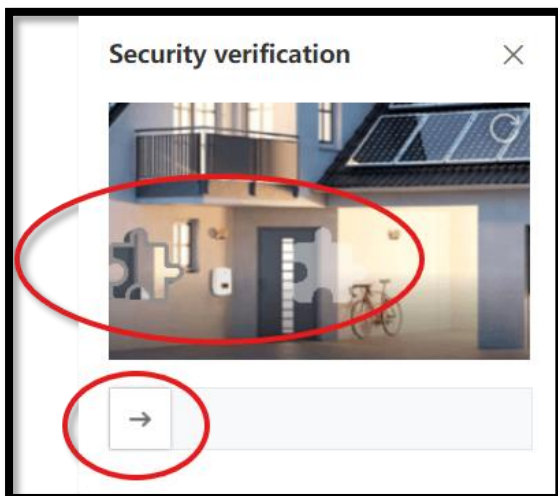


- Check your email **Inbox** and enter 6-digit number into Vcode:



- Put a Tick to **Privacy Policy** and Click **Next**.

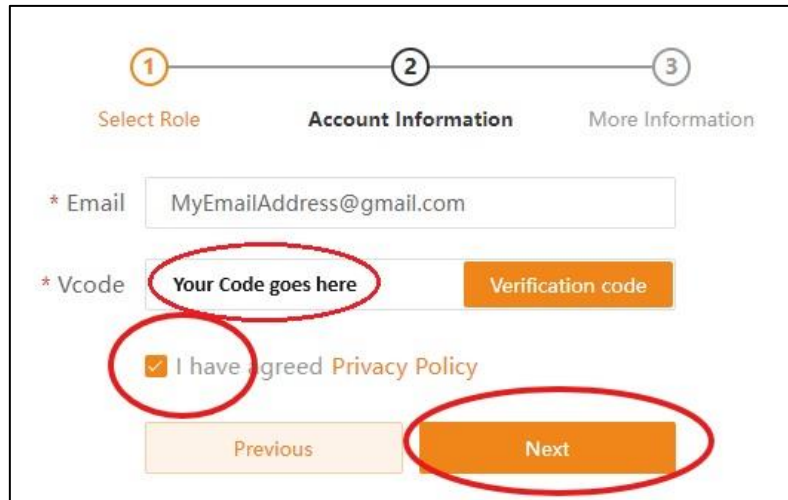


- Create **username** (should be unique), create **password**, confirm **password**, select **Time Zone** and Click on **Register**.

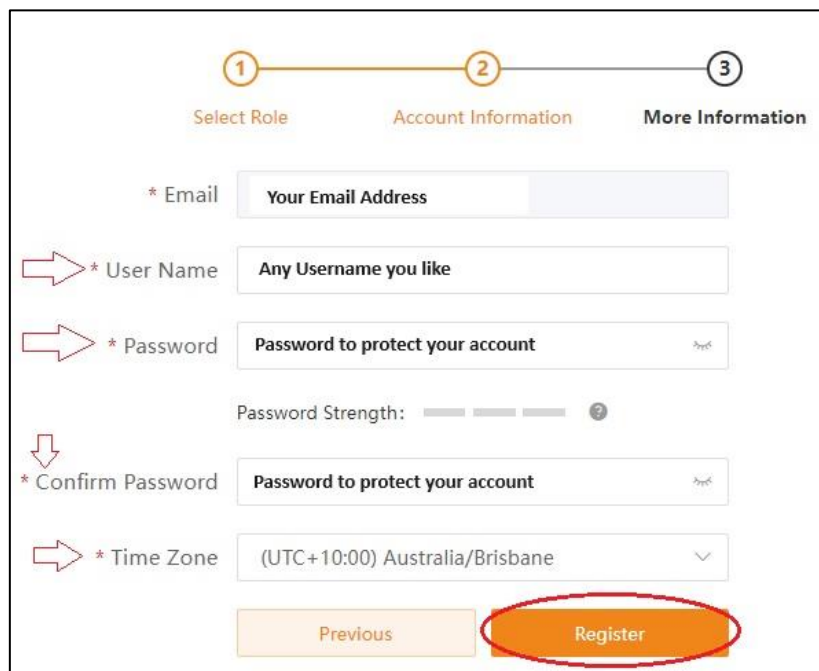

- Please **Log In** with your registered **Email address** and **password**.

Step 4: Creating a plant

- To create a plant please click on **<Add Plant>**

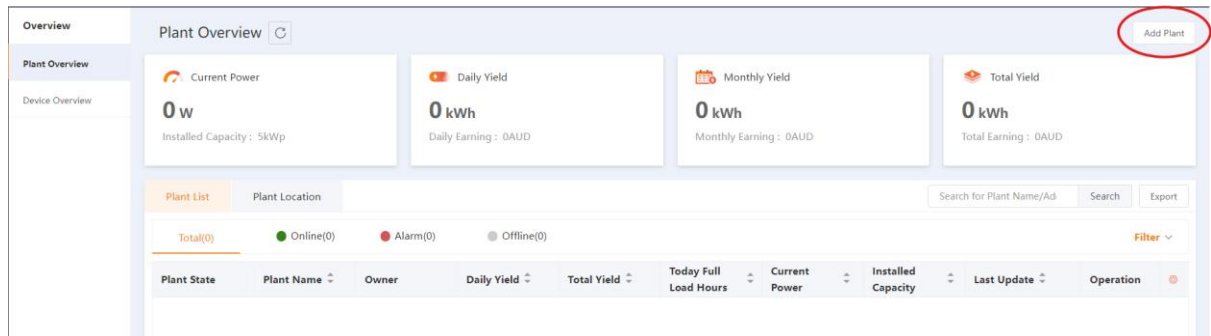

- Fill up** your details and press **Next**:
 - Plant Name** – give a name to your plant.
 - Plant type** – select between Residential and Commercial
 - Installed Capacity** – Enter the size of your Inverter (example for inverter **Solis-1P5K-4G** the size would be 5).
 - Area** – Enter your suburb in map
 - Plant Address** – Enter your address
 - Time Zone** – Select your time zone, **UTC +10** for Brisbane/Canberra/Melbourne
 - Currency** – AUD for Australian Dollar
 - NMI** – 10-11 character can be found in your **Electricity Bill**
 - Agent** – SAPN for SA, WA for WA, Others for the rest of Australia.
 - Datalogger SN** – Serial Number of your datalogger.

Add Plant

1 Basic Information > 2 Tariff Management > 3 Associated Account > 4 More Information

* Plant Name

* Plant Type

Max. module power
 W

Module

* Installed Capacity
 kWp

* Area

* Plant Address

* Time Zone
→ (UTC+10:00) Australia/Canberra ▼

Daylight Saving Time

* Currency
→ AUD ▼

* NMIⓈ
→ 10-11 Digits NMI

Agent
→ OTHERS ▼

Organization CodeⓈ
Organization Code Search

Datalogger SN
→ 5A1230... ▼
Add datalogger SN +

Cancel **Next**

- Select **Fixed tariff** and enter your **Feed In Tariff** (provided you by your electricity supplier)

Feed-in Tariff

* Tariff Type
→ Fixed Tariff ▼

* Tariff
→ 0.05 AUD/kWh

- Press **Next** on **Associated accounts**.

Basic Information > Tariff Management > **Associated Account** > More Information


Plant GuestⓈ
Add guest, a plant can have multiple guests ⊙

Third party services
solar analytics >
Unlock extra solar savings - Try it for free! Add

Previous **Next**


- You may fill up your installer details and press **Create Plant**.

- Plant successfully created, click on **<View Plant>**

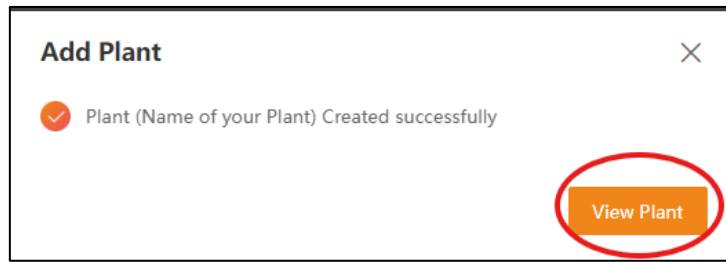

DONE!

You should be able to see your **plant** as per image below:

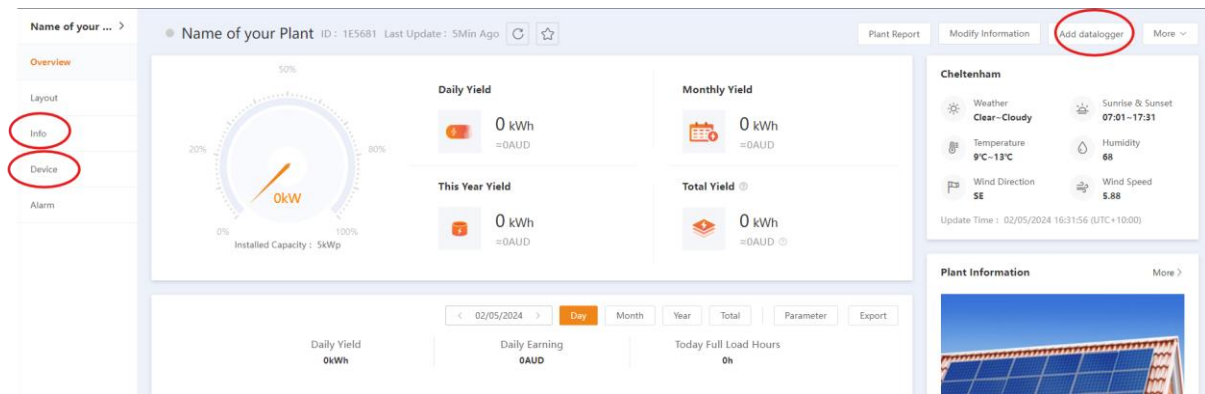

- If you would like to change information - press **<Info>**
- If you would like to see your Inverter & datalogger information – press **<Device>**
- If you would like to add another datalogger – press **<Add datalogger>**

Note: Once datalogger is connected to your Wifi, please wait for 15 minutes and your plant will turn Online, and you be able to track inverter generation.